

Frameless sliding bath door 5407-59

Features

- Frameless.
- 1/4" (6 mm) thick tempered glass.
- CleanCoat® technology creates a protective barrier that repels water, prevents dirt and minerals from collecting, and makes it easier to remove hard water spots.
- Reversible top track offers a choice of curved or flat profile.

Material

Anodized aluminum prevents rust and corrosion.

Technology

- Knob handles.
- Tempered glass ensures maximum safety and durability.

Installation

- Out-of-plumb adjustability simplifies installation.
- Not for use in hospitality.
- For residential use only.

Recommended Products/Accessories

K-23723 Faucet cleaner

Included Components

Additional Components: Hardware kit



Codes/Standards

ANSI Z97.1 CPSC 16CFR 1201

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	Ν	Nickel
	0	Cilvor

Available Glass Options Code Description

Clear



Finesse™ Frameless sliding bath door

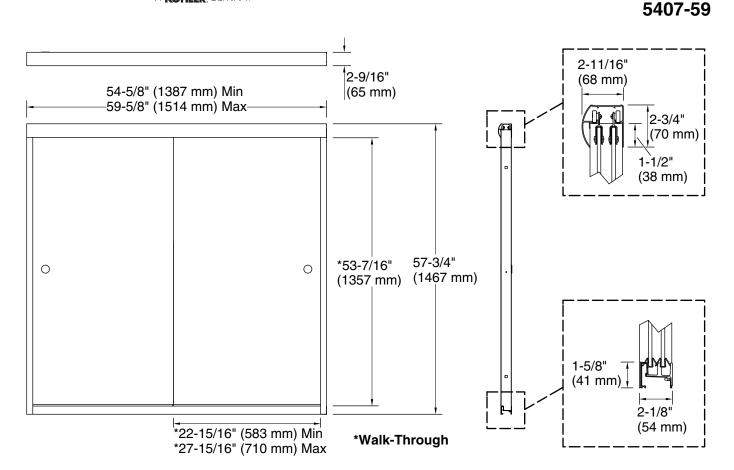

Technical Information

All product dimensions are nominal.

Installation type: For bath installation Opening Width - 54-5/8" (1387 mm)

Min:

Opening Width - 59-5/8" (1514 mm)

Max:

Walk-through - Min: 22-15/16" (583 mm) Walk-through - Max: 27-15/16" (710 mm)

Base-To-Wall

1/2" (13 mm)

Radius - Max:

Glass thickness: 1/4" (6 mm)
Glass coating: CleanCoat®

Notes

Install this product according to the installation guide.

The vertical opening should be a minimum of 60-1/2" (1537 mm) to allow for installation clearance.