

## CAST IRON SUMP PUMP


### CONSTRUCTION

- ▶ Durable Epoxy-Coated Cast Iron Housing/Volute
- ▶ Top Suction Design Eliminates Air Lock and Minimizes Clogging from Debris in the Bottom of the Sump Pit
- ▶ Reliable Thermoplastic Impeller for Maximum Water Flow
- ▶ 1-1/2 in. NPT Discharge for Easy Installation and Compliance with Building Codes
- ▶ For Use In 11 in. Diameter or Larger Sump Basins
- ▶ 8 ft. SJTW Power Cord


### BENEFITS

- ▶ This pump delivers unsurpassed protection. The switch is tested 1,000,000 times, up to 10X times more than competitors.
- ▶ This pump is assembled in the USA to deliver dependable performance that lasts for years.
- ▶ This pump is easy to install. Start to finish in about 15 minutes.
- ▶ Air Lock can burn out your pump. This pump is precision engineered to eliminate Air Lock.



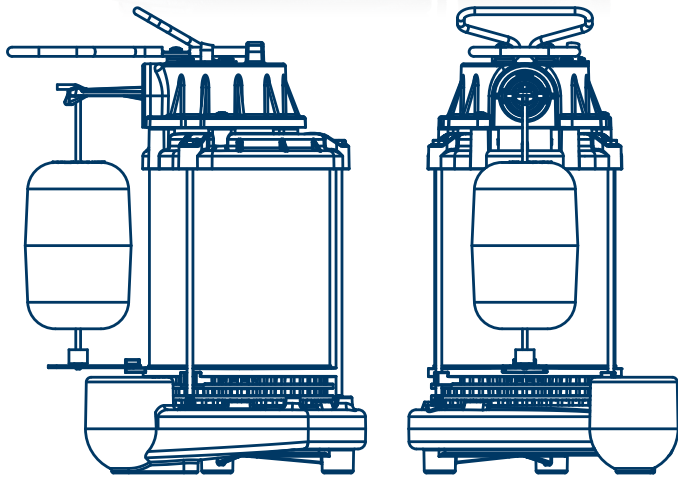

● F50CIS ● F33CIS

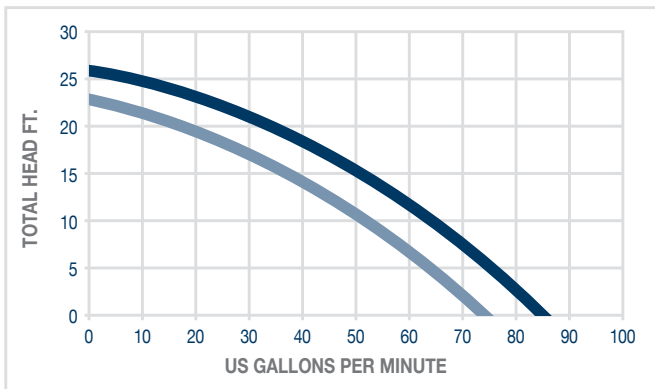

## CORROSION RESISTANT CONSTRUCTION WITH TOP SUCTION DESIGN TO MINIMIZE CLOGGING

MODEL: F33CIS, 1/3 HP | F50CIS, 1/2 HP

### PUMP SNAPSHOT

- ▶ **HP** - F33CIS, 1/3 HP | F50CIS 1/2 HP
- ▶ **Construction** - Durable Epoxy-Coated Cast Iron
- ▶ **Switch Type** - Integrated Vertical Float Switch
- ▶ **Motor** - 120 Volt, PSC Oil-Filled Motor
- ▶ **Impeller** - Centrifugal
- ▶ **Intake** - Top Suction
- ▶ **Discharge** - 1 1/2 In. NPT
- ▶ **Submersible** - Yes
- ▶ **F33CIS UPC** - 040066217899
- ▶ **F50CIS UPC** - 040066217905

### PUMP SPECIFICATIONS

- ▶ **Length** - 10 1/2 In.
- ▶ **Width** - 9 In.
- ▶ **Height** - 11 In.
- ▶ **Weight** - 23 Lbs.
- ▶ **Power Cord** - 8 Ft.

### PERFORMANCE

- ▶ **F33CIS** - 1/3 HP - Max Flow 77 GPM: 51 GPM @ 10'
- ▶ **F50CIS** - 1/2 HP - Max Flow 85 GPM: 64 GPM @ 10'

### FLOW RATES:

MODEL:F33CIS - 1/3 HP	GPM @ 5'	GPM @ 10'	GPM @ 15'	GPM @ 20'
Gal/Min @ 0 MAX Flow 77	64	51	37	20

MODEL:F50CIS - 1/2 HP	GPM @ 5'	GPM @ 10'	GPM @ 15'	GPM @ 20'
Gal/Min @ 0 MAX Flow 85	75	64	51	34

### 3 YEAR LIMITED WARRANTY

- ▶ Assembled in USA with Foreign and Domestic Parts

