



### INSTALLATION, OPERATION & APPLICATION GUIDE

For more information on our complete range of American-made products – plus wiring diagrams, troubleshooting tips and more, visit us at [www.icmcontrols.com](http://www.icmcontrols.com)



#### IMPORTANT SAFETY INFORMATION



**ELECTRICAL SHOCK HAZARD!** – Before installing this unit, turn off power at the main service panel by removing the fuse or switching the appropriate circuit breaker to the OFF position.

- **WARNING** – No Serviceable Parts (Attention: Aucune pièce remplaçable ou reparable).
- **WARNING** – Shock hazard – Do not open (ATTENTION – RISQUE DE CHOC – NE PAS OUVRIR).

Please follow all State, Local and National electrical codes when installing this product. Installation should only be done by a licensed electrician for Type 1 devices or a licensed HVAC technician for Type 2 devices.

#### INSTALLATION INSTRUCTIONS

The conductors used to connect the SPD shall not be any longer than necessary and shall avoid unnecessary bends.

1. Turn off the main breaker and/or main power to the service disconnect.
2. Verify your mains voltage and match that with **ICM533** ratings.
3. Remove the cover on service disconnect or the electrical panel.
4. Mount the **ICM533** through the 3/4" conduit connection of the electrical panel.
5. Remove the retaining ring and washer on the **ICM533**.
6. Feed the wires into the electrical panel or service disconnect.
7. Re-secure the retaining ring and washer.
8. Route the white wire to the neutral lug and secure.

#### Wiring Type 1 installation

- Route the two black wires and one red wire to the appropriate L1, L2, and L3 connections before the breaker panel as seen in the wiring diagram for Type 1 installation and according to your local, state, and national electrical codes.
- \*\* **NOTE:** The red wire attaches to the high-leg.

#### Wiring Type 2 installation

- Route the two black wires and one red wire (L1, L2, and L3) to the individual breakers on the circuit breaker panel as seen in the wiring diagram for Type 2 installation and according to your local, state and national electrical codes.
  - \*\* **NOTE:** The red wire attaches to the high-leg.
9. Reinstall cover on service disconnect or the electrical panel.
  10. Restore power; Green LED should be on indicating full protection.

Limited lifetime product, up to a 3-year \$10,000 connected equipment warranty



#### MAINTENANCE

Periodically check the LED status on the SPD. If the Greenlight is OFF, the protection is no longer available and the SPD needs to be replaced immediately. 12 AWG stranded copper wire or larger required. Product contains no serviceable parts. This device features an internal protection that will disconnect the surge protective component at the end of its useful life but will maintain power to the load – now unprotected.

#### MODE OF OPERATION



The **ICM533** is a UL Listed Type 1 & 2 Surge Protective Device for Delta High-Leg 120/240 VAC Three Phase voltage configurations. When a surge occurs, the **ICM533** will absorb the surge up to the limits expressed in the specifications section of this guide. The **ICM533** incorporates thermal protection on the surge elements (TMOV's) which allows for safe disabling of the surge elements when a surge exceeds the thermal limits of the device. The **ICM533** has a status light on the control which identifies operational status when illuminated. The **ICM533** can be installed as a Type 1 or Type 2 device for both indoor and outdoor applications. Suitable for use on a circuit capable of delivering not more than 200kA RMS symmetrical amperes, 240V maximum (Convient à des circuits produisant au plus 200kA RMS A eff., 240V maximum).

#### SPECIFICATIONS

Description	Ratings		
<b>Service Voltage (3-Phase)</b>	120/240 VAC Delta High-Leg		
<b>Short Circuit Current Rating (SCCR)</b>	200 kA		
<b>Nominal Discharge Current (In)</b>	20 kA		
<b>SPD Type</b>	Type 1 (Can also be used in Type 2 applications)		
<b>Surge Protection Technology</b>	TFMOV		
<b>Protection Mode</b>	3 for Delta configuration		
<b>VPR (Vpk)</b>	<b>VOLTS (V)</b>	<b>MODE</b>	<b>VPR (Vpk)</b>
	240/120	L-L	1200
		L-N	700
		H-L	1500
		H-N	900
<b>Maximum Continuous Operation Voltage (MCOV)</b>	<b>L-L: 300 VAC</b>	<b>L-N: 150 VAC</b>	<b>H-L: 450 VAC</b>
<b>Input Power Frequency</b>	50/60Hz		
<b>Diagnostics</b>	Green LED indicates surge protection present		
<b>Enclosure Rating</b>	NEMA/Type 4X water tight plastic enclosure for outdoor and indoor installation		
<b>Installation Point</b>	Electrical panel/disconnect		
<b>Dimensions</b>	4.3" X 4.1" X 2.3"		
<b>Operating Temperature</b>	-40°F to 185°F (-40°C to 85°C)		
<b>Operating Humidity</b>	Less than 85%, noncondensing		
<b>Operating Altitude</b>	Less than 2000 meters		
<b>Agency Certification and Approvals</b>	ANSI/UL1449 4th Edition Listed Device - cULus Listed		

**Type 1 Wiring – Fuse Disconnect**

**Type 2 Wiring – Circuit Breaker**

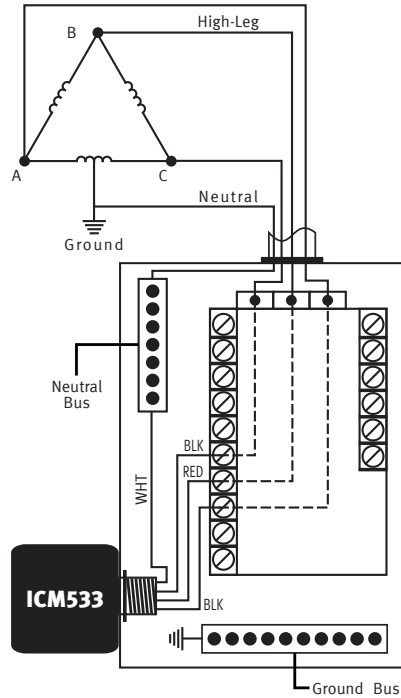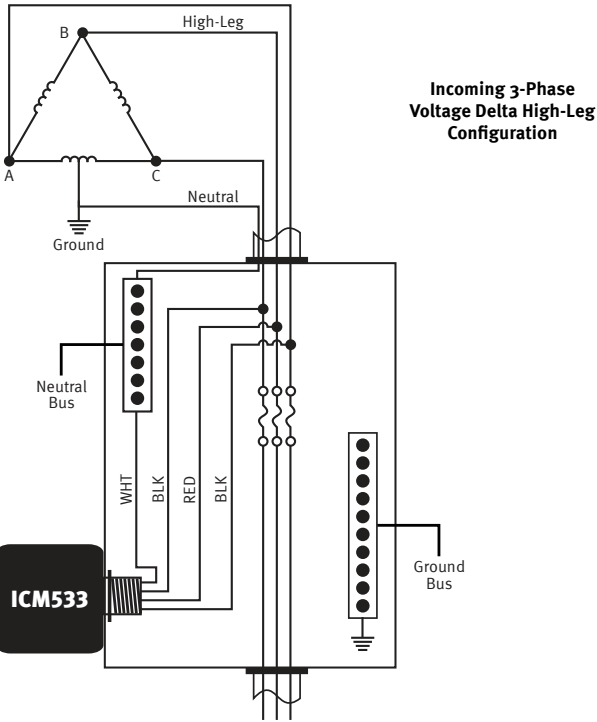

**Note 1:**

For the ease of checking the SPD protection status, the LED display should face outwards after installation has been complete.

**Note 2:**

**ICM533** is a Type 1 and 2 SPD, designed to be compatible with 3-phase Delta voltage configuration. Please check your supply voltage configuration and voltage levels before installing the **ICM533** per wiring diagram.

**Note 3:**

- When installing the Surge Protecting Device (SPD), avoid sharp bends in the conduit and long line sets.
- Keep the mounting conduit straight and short in length.

**Legend:**

- BLK** Black
- WHT** White
- A,B,C** Incoming phase
- Ground

**LIMITED LIFETIME PROTECTION WARRANTY**

*Review enclosed warranty information for full details & registration information*

*For warranty registration, please go to [www.icmcontrols.com](http://www.icmcontrols.com) and click on **Warranty Registration***

