






300 S. DAYTON ST.
DAVISON, MI 48423
PH: 810-503-9000
FAX: 810-653-8714

1056-215

DESCRIPTION:

CONNECTS 2 IN. CI/PL TO 1½ IN. CI/PL

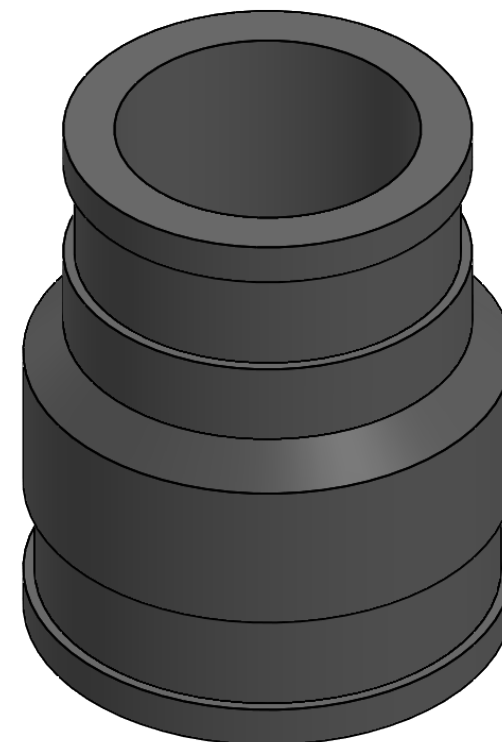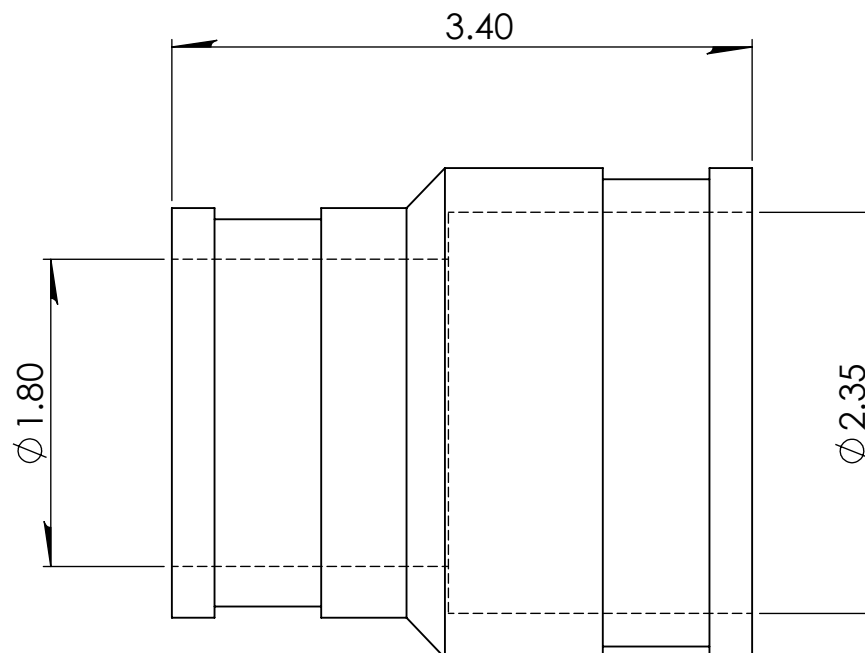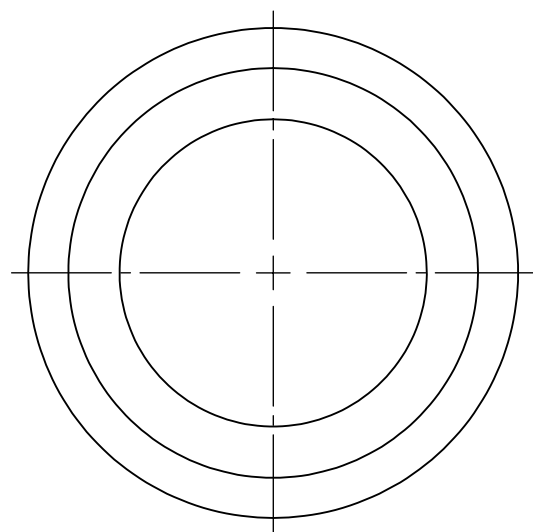

NOTE:

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
FERNCO, INC. ANY REPRODUCTION IN
PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF FERNCO, INC.
IS PROHIBITED.

TOLERANCES:
FRACTIONAL ± 1/4"
.XX = ±.06
ANG. = ±3°
UNLESS OTHERWISE SPECIFIED

MATERIAL		CLAMPS USED	300 SERIES STAINLESS	UNITS: INCHES	SIZE: A	AUTHOR: ELI MILLER		SCALE: NOT TO SCALE	
PART WEIGHT		INSTALLATION TORQUE	60 IN · LBS						
BOX QUANTITY		MIN/MAX TEMP.	-30/140 °F	3RD ANGLE PROJECTION DO NOT SCALE DRAWING	CHECKER:	DATE:	10/2/2018	SHEET 1 OF 1	
PRESSURE TESTED		ASTM	D5926						