Job	Name/	Location:
-----	-------	-----------

<b>n</b> ~	+~	•
υa	ιe	•
Da	te	:

## PO No.:

Architect:

Engr:

\_\_\_\_

Rep:

**Performance:** 

Cooling Nominal Test Conditions:

Power Supply  $(V/Hz/Ø)^{1,2}$ 

Installed Liquid Pipe (in., O.D.)

Installed Vapor Pipe (in., O.D.)

Liquid Connection (in., O.D.)

Vapor Connection (in., O.D.)

Drain (in., O.D. / I.D.)

**Temperature Sensor** 

**Controls Features:** 

Indoor: 80°F DB / 67°F WB Outdoor: 95°F DB / 75°F WB

Rated Amps (A)

Electrical:

Piping:

Nominal Cooling Capacity (Btu/h) Nominal Heating Capacity (Btu/h) (Project Manager)

GC: Mech:

Heating Nominal Test Conditions:

Indoor: 70°F DB / 60°F WB

Outdoor: 47°F DB / 43°F WB

For:

File

12,000

13,800

208-230/60/1

0.8

ø1/4

ø3/8

ø1/4

ø3/8

1 - 1/4 / 1

Thermistor

Approval

## KNMKB121A Multi F R32 Low Static Ducted Indoor Unit 12,000 Btu/h



Resubmit

Other\_

## **Entering Mixed Air:**

0	
Cooling (°F WB)	57 ~ 77
Heating (°F DB)	59 ~ 81

## Unit Data:

Refrigerant Type	R32
Refrigerant Control	EEV
Sound Pressure (H/M/L) dB(A) <sup>3</sup>	31 / 28 / 27
Primary Filter	Washable Pre-filter
Net Weight (lbs.)	45.4
Shipping Weight (lbs.)	55.2

### Fan:

Sirocco
2
Brushless Digitally Controlled/Direct
353 / 300 / 247
0.10
0.00
0.20
1.86

#### Notes:

1. Acceptable operating voltage: 187V-253V.

2. The power wiring and the communication wiring from the outdoor unit to the indoor unit, or from the branch distribution unit to the indoor unit is field supplied and must be stranded, shielded or unshielded (if shielded, it must be grounded to the chassis of the outdoor unit only). All wiring must comply with applicable local and national codes.

a. Power wiring and communication wiring from outdoor unit to indoor unit (No. x AWG) 3 x 14 / 2 x 18.

- b. Power wiring and communication wiring from branch distribution unit to indoor unit (No. x AWG) 3 x 14 / 2 x 18.
- 3. Sound Pressure levels are tested in an anechoic chamber under ISO Standard 3745.
- 4. Adjust fan speed to correct for static pressure increases when using field-supplied air filter.
- 5. At factory fan speed setting.
- See Engineering Manual for sensible and latent capacities.
  The indoor unit comes with a dry helium charge.
- 8. Corresponding refrigerant piping length is in accordance with standard length of each outdoor unit and the level difference is 0 ft. All capacities are net with a combination ratio between 95 105%.
- Must follow installation instructions in the applicable LG installation manual.

Auto restart

• Sleep mode

• Drain pump

• ESP control

• Timer (on/off/weekly)

R32 leak detection sensor

- Inverter (variable speed fan)Long-life washable prefilter
- Hot start
- Self diagnosisSoft dry operation
- Auto operation

#### **Optional Accessories:**

□ Single-Port Shutoff Valve - PRHPZ010A □ Auxiliary Heater Kit - PRARH1

### **Controller Options:**

- □ MultiSITE<sup>™</sup> CRC\* Controllers
- □ Simple Remote Controllers
- □ Standard III Remote Controllers
- Deluxe Remote Controller
- □ Remote Temperature Button Sensor
- Dry Contacts
- UWi-Fi Module PWFMDD200



Tag #:

## Job Name/Location:

# KNMKB121A Multi F R32 Low Static Ducted Indoor Unit 12,000 Btu/h




Tag No.:

PO No.: \_

Model Number	٨	8	υ	٥
KNMKB091A	30-15/32	27-9/16	27-9/16 28-27/32 25-31/32	25-31/32
KNMKB121A KNMKB181A	38-11/32		35-7/16 36-23/32 33-27/32	33-27/32

Number	Name	Descripition
-	Liquid pipe connection	
2	Gas pipe connection	
з	Drain pipe connection	
4	Power supply connection	
5	Air discharge	
9	Air suction	

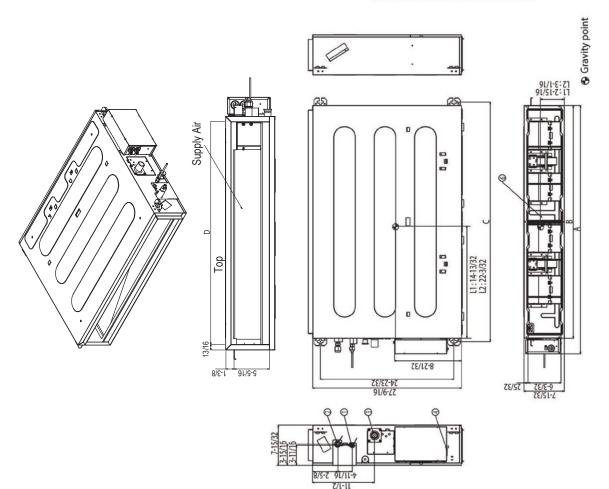

Date: