


# Rapid SL Wall Carrier for Toilet

MODEL # 38996000

Pure Freude  
an Wasser

GROHE

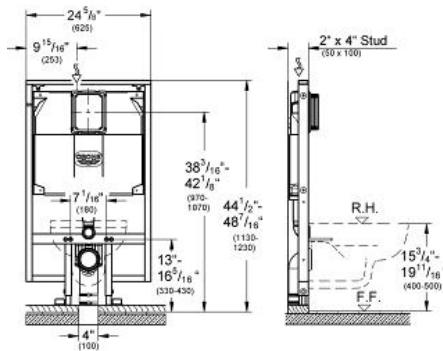

## Product Description:


### Rapid SL Wall Carrier for Toilet

#### Standard Specification:

- Flushing cistern 3 "
- **44" installation height**
- Element width 24"
- For on-the-wall installations or studded walls
- Powder coated self-supporting steel frame
- For dry-cover (completely pre-assembled)
- With fixed connections
- Quick adjustment, lockable
- Mounting material
- WC mounting screws (2x)
- Mounting kit for ceramic
- Distance of mounting screws (7" - 9")
- Diameter Ø 3 " outlet elbow
- Depth adjustable
- Transition (Ø 3 ")
- Inlet and outlet connecting set
- Flushing cisten 3 ", 1.6-2.4 gal
- Adjustment from factory (1.6 gal and .8 gal)
- Pneumatic discharge valve offering: 3 modes of operation: dual flush or start/stop or single flush
- Water supply from top
- Insulated against condensation
- Low noise (group I acc. to/German Noise Specification)
- 1/2" angle valve
- With push fit flexible hose union
- No tools required for the installation of the inspection shaft incl. protection during construction phase
- for vertical use
- **Without mounting brackets**
- **Without wall plate/actuation**
- **GROHE EcoJoy** technology for less water and perfect flow

#### Applicable Codes & Standards:

- Energy Policy Act of 1992
- ASME A112.18.1/CSA B125.1



**Color:**  
□ 38996000