




4700 W. 160th St.
Cleveland, OH 44135
PH:800-321-9532
FX:800-321-9535
www.oatey.com

TECHNICAL SPECIFICATION

**TWIST-N-SET®
CAST IRON REPLACEMENT
CLOSET FLANGE**



TECHNICAL SPECIFICATION: Oatey Twist-N-Set Cast Iron Replacement Closet Flanges are designed to replace broken cast iron closet flanges. Gasket expands to fit inside of service weight, heavy weight and no hub pipe. Installs easily without tools.

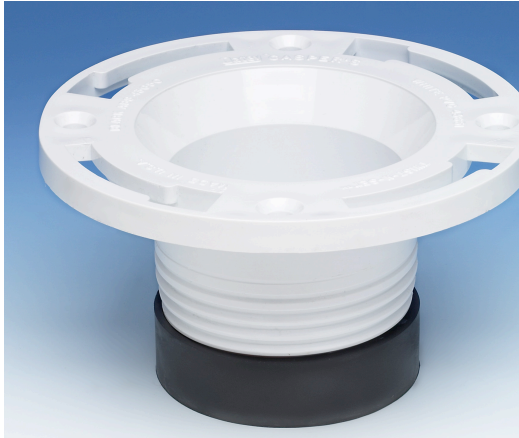

PHYSICAL/CHEMICAL PROPERTIES

Material/Color ABS Plastic = Black
 PVC Plastic = White
 Cast Iron= Black

DIRECTIONS FOR USE

Remove old cast iron flange. Thread rubber gasket onto flange until the gasket expands to meet the inside walls of the pipe. Tilt and twist flange until the gasket begins to grip the pipe. Level and push the flange flush with the floor while using the closet bolts to complete the tightening process. Align the flange and screw it onto the floor.

COMMON APPLICATIONS

Designed to replace broken cast iron closet flanges. Gasket expands to fit inside of service weight, heavy weight and no hub pipe. Installs easily without tools.

PRODUCT NUMBER	DESCRIPTION	PACK	CARTON WEIGHT
43654	3" PVC Twist N Set Closet Flange	2	1.4
43655	3" ABS Twist N Set Closet Flange	2	1.4
43651	4" PVC Twist N Set Closet Flange	2	1.1
43650	4" ABS Twist N Set Closet Flange	2	1.1
43653	4" Cast Iron Twist N Set Closet Flange	2	10.0