


# BISMAT<sup>®</sup> Flash

(A 05 200)

for metal pipes 3/8 - 1 1/2

3/8"

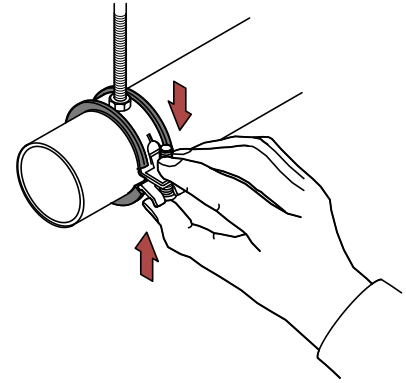

## Features and benefits

- single screw clamp
- with BISMAT<sup>®</sup> Flash quick locking system
- clamp easy to close with one hand
- the locking screw can be secured without use of tools
- material: steel
- zinc plated
- noise insulating lining, EPDM rubber, black
- age resistant lining
- sound insulating lining according DIN 4109
- tested for fire safety
- Plenum rated - tested to ASTM E-84



Part No.	D (mm)	IP (°)	CT (°)	G (°)	B (°)	H (°)	h (°)	b x s (mm)	cs	F <sub>a,z</sub> (lbf)	Pack 1
CR3379018	15 - 18	3/8	1/2	3/8"	1.9	1.4	0.87	20 x 1.25	M6	180	50
CR3379023	20 - 23	1/2	3/4	3/8"	2.1	1.5	0.91	20 x 1.25	M6	180	50
CR3379028	25 - 28	3/4	1	3/8"	2.3	1.7	1.00	20 x 1.25	M6	180	50
CR3379035	31 - 35	1	1 1/4	3/8"	2.6	2.0	1.20	20 x 1.25	M6	180	50
CR3379043	40 - 43	1 1/4	1 1/2	3/8"	2.9	2.4	1.30	20 x 1.25	M6	180	50
CR3379051	48 - 51	1 1/2	-	3/8"	3.2	2.6	1.50	20 x 1.25	M6	180	50
CR3379056	53 - 56	-	2	3/8"	3.3	3.0	1.60	20 x 1.25	M6	180	50
CR3379063	57 - 63	2	-	3/8"	3.6	3.2	1.80	20 x 1.25	M6	180	50

The max. allowed load (F<sub>a,z</sub>) is calculated using specific statistical methods related to the breaking load, taking into account a deflection of 1.5 mm or 2% of the maximum nominal clamp diameter.

