

Tube Clamp


Submittal Information
Revision A: July 25, 2013

Project Information

Job Name:	
Location:	Part No. Ordered:
Engineer:	Date Submitted:
Contractor:	Submitted By:
Manufacturer's Representative:	Approved By:

Technical Data

Material: Polypropylene (PP)

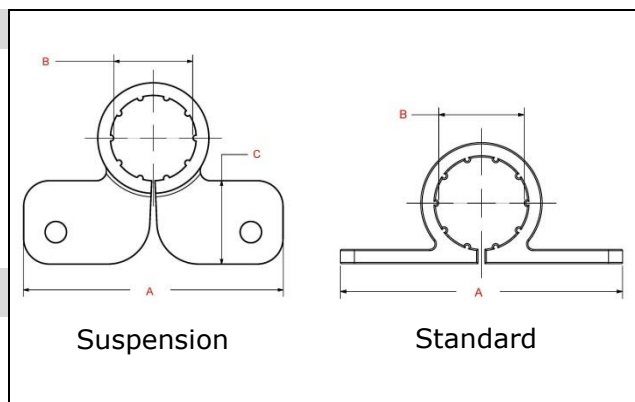

Product Information and Application Use

Tube Clamps secure 1/2" and 3/4" Uponor crosslinked polyethylene (PEX-a) tubing products.

✓	Description	Part Number	A	B	C	Weight
☐	Tube Clamp Suspension (1/2" PEX), 100/pkg.	A7250500	2.00"	0.605"	0.65"	0.01 lbs.
☐	Tube Clamp Suspension (3/4" PEX), 50/pkg.	A7250750	2.00"	0.850"	0.65"	0.01 lbs.
☐	Tube Clamp Standard (1/2" PEX), 100/pkg.	A7350500	2.00"	0.605"	N/A	0.01 lbs.
☐	Tube Clamp Standard (3/4" PEX), 50/pkg.	A7350750	2.38"	0.850"	N/A	0.01 lbs.

Installation

Fasten the tube clamp onto the tubing mounting surface. Refer to the Uponor Radiant Floor Installation Handbook or the Uponor Professional Plumbing Installation Guide for additional information.

Standards

N/A

Codes

N/A

Listings

N/A

Related Applications

Radiant Heating and Cooling Systems
Snow and Ice Melting Systems
Permafrost Protection Systems
Turf Conditioning Systems
PEX-a Plumbing Systems

Contact Information

Uponor, Inc.
5925 148th Street West
Apple Valley, MN 55124 USA
Phone: 800.321.4739
Fax: 952.891.2008
www.uponorpro.com

Uponor Ltd.
2000 Argentia Road, Plaza 1, Suite 200
Mississauga, ON L5N 1W1 CANADA
Phone: 888.994.7726
Fax: 800.638.9517
www.uponorpro.com