KOHLER_®

Elongated Floor Mount, Flushometer Bowl K-96064-SS

Features

- Elongated, 10-1/2" height bowl.
- Antimicrobial finish inhibits the growth of mold-, mildew-, stain-, and odor-causing bacteria on the fixture surface. This product does not protect users against bacteria, viruses, or other disease organisms. Always clean and wash this product thoroughly before and after each use.
- 10" x 7" (254 mm x 178 mm) water surface.
- 1-7/8" (48 mm) fully-glazed trapway.
- 10" or 12" (254 or 305 mm) rough-in.
- Includes K-4686 toilet seat with scalloped handhold locations.
- 1-1/2" (38 mm) top spud.

Material

• Vitreous china.

Technology

- Designed to outperform competitors in bowl cleanliness and plug resistance.
- Excellent bowl rinse.
- Maximum drain line carry at 1.28 gpf per ASME Standard.

Installation

- 24-7/16" L x 13-1/8" W x 10-1/2" H.
- Children's height bowl.
- Replaces Primary K-4321 and K-4384. Height and footprint may vary.

Water Conservation & Rebates

- 1.28 gpf 1.6 gpf (4.8 6.0 lpf) flush range.
- The ultra-low water consumption is ideal for water conservation and can help earn Water Efficiency points in the LEED[®] Green Building Rating System.

Included Components

Additional Components: Bolt cap accessory pack Spud





Codes/Standards ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1

KOHLER[®] One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes


Color tiles intended for reference only.

Color Code Description





Primary™ Elongated Floor Mount, Flushometer Bowl K-96064-SS

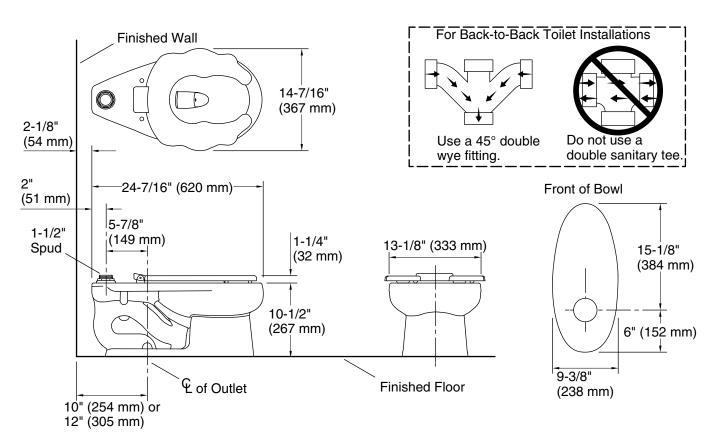

Technical Information

All product dimensions are nominal.		
Toilet type:	Flushometer, Floor-mount	
Waste Outlet:	Floor	
Bowl shape:	Elongated	
Flush type:	Flushometer valve siphon	
Spud size:	1-1/2", Inlet, Top	
Trap passageway:	1-15/16" (49 mm)	
Water Consumption Full:	1.28 gpf (4.8 lpf) or 1.6 gpf (6 lpf)	
Water surface size:	10" x 7" (254 mm x 178 mm)	
Rim to water surface:	4-3/8" (111 mm)	
Rough-in:	12" (305 mm)	

Fixture Supply Requirements

Min static pressure:	35 psi (241.3 kPa)
Max static pressure:	80 psi (551.6 kPa)
Min flowing	25 psi (172.4 kPa)
pressure:	
Min flow rate:	25 gpm (94.6 lpm)

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

Requires flushometer valve to match desired water consumption 1.28 gpf (4.8 lpf) or 1.6 gpf (6 lpf).

ADA compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications. For the most current Specification Sheet, go to <u>www.kohler.com</u>.

