

GripTip™

Trap Adapter Test Nut



Simple

Install your trap adapter at rough-in and test with the DWV system – holds 5 PSI air.

Molded-in cap removes easily after test

Convenient

Integral sealing ferrule means no slip-joint washers

No test caps/plugs to glue on and cut off

Universal

Works with any 1-1/2" p-trap



Supply

Drainage

Support

Specialties


www.siouxchief.com

TAKE THE FIELD.





Integral sealing ferrule.
No slip-joint washers
to lose

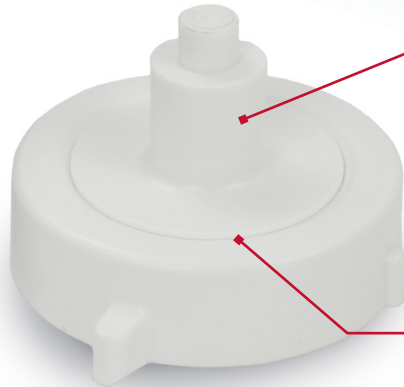

Test port accepts 5/8" OD compression
fittings, and provides an easy-grip
handle for cap removal

Tough, reinforced polypro material
is durable enough to reuse

Grooved design for clean,
easy removal after test



881-02A



To easily fill/drain the DWV test through the GripTip, cut off the smaller tip and attach the compression end of a test fitting to the 5/8" OD test port. Holds a 5 PSI air test.

After test, grasp the tip with pliers to break out and remove the test cap. Once the cap is removed, it works like a standard nut – but without the need for a slip-joint washer.



230-9506GT



988-6GT



881-02A

» Buying Information

ITEM NO.	DESCRIPTION	PKG	MIN. QTY.	CASE QTY.
TRAP ADAPTER TEST NUTS				
230-9506GT	1-1/2" PVC Sch. 40 HUB trap adapter with GripTip™ test nut	B	25	25
230-9506SGT	1-1/2" PVC Sch. 40 SPIGOT trap adapter with GripTip™ test nut	B	25	25
988-6GT	GripTip™ test nut for 1-1/2" trap adapters	B	25	25
ACCESSORIES				
881-02A	Test fitting with 15 PSI gauge - 5/8" OD compression x air-fill valve	B	1	10
881-02H	Water fill valve - 5/8" OD compression x FHT swivel	B	1	25