



**Anglesey™**

Top spud antimicrobial flushometer bowl  
**K-4386-SS**

### Features

- Vitreous china.
- Elongated bowl.
- Angle back and wall outlet.
- 1-1/2" (38 mm) top spud.
- 2-3/8" (60 mm) passageway.
- 11" (279 mm) x 9-1/2" (241 mm) water area.
- 4-1/2" (114 mm) rough-in.
- 1.6 gpf (6.0 lpf)
- 27-1/2" (699 mm) x 14-1/2" (368 mm) x 15" (381 mm).
- Antimicrobial finish inhibits the growth of mold-, mildew-, stain-, and odor-causing bacteria on the fixture surface. This product does not protect users against bacteria, viruses, or other disease organisms. Always clean and wash this product thoroughly before and after each use.

### Included Components

Additional Components:

- Bolt cap accessory pack
- Floor screws (pair)
- Spud



### Codes/Standards

ASME A112.19.2/CSA B45.1  
DOE - Energy Policy Act 1992

### KOHLER® One-Year Limited Warranty


See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|

|                                                                                     |   |       |
|-------------------------------------------------------------------------------------|---|-------|
|  | 0 | White |
|-------------------------------------------------------------------------------------|---|-------|

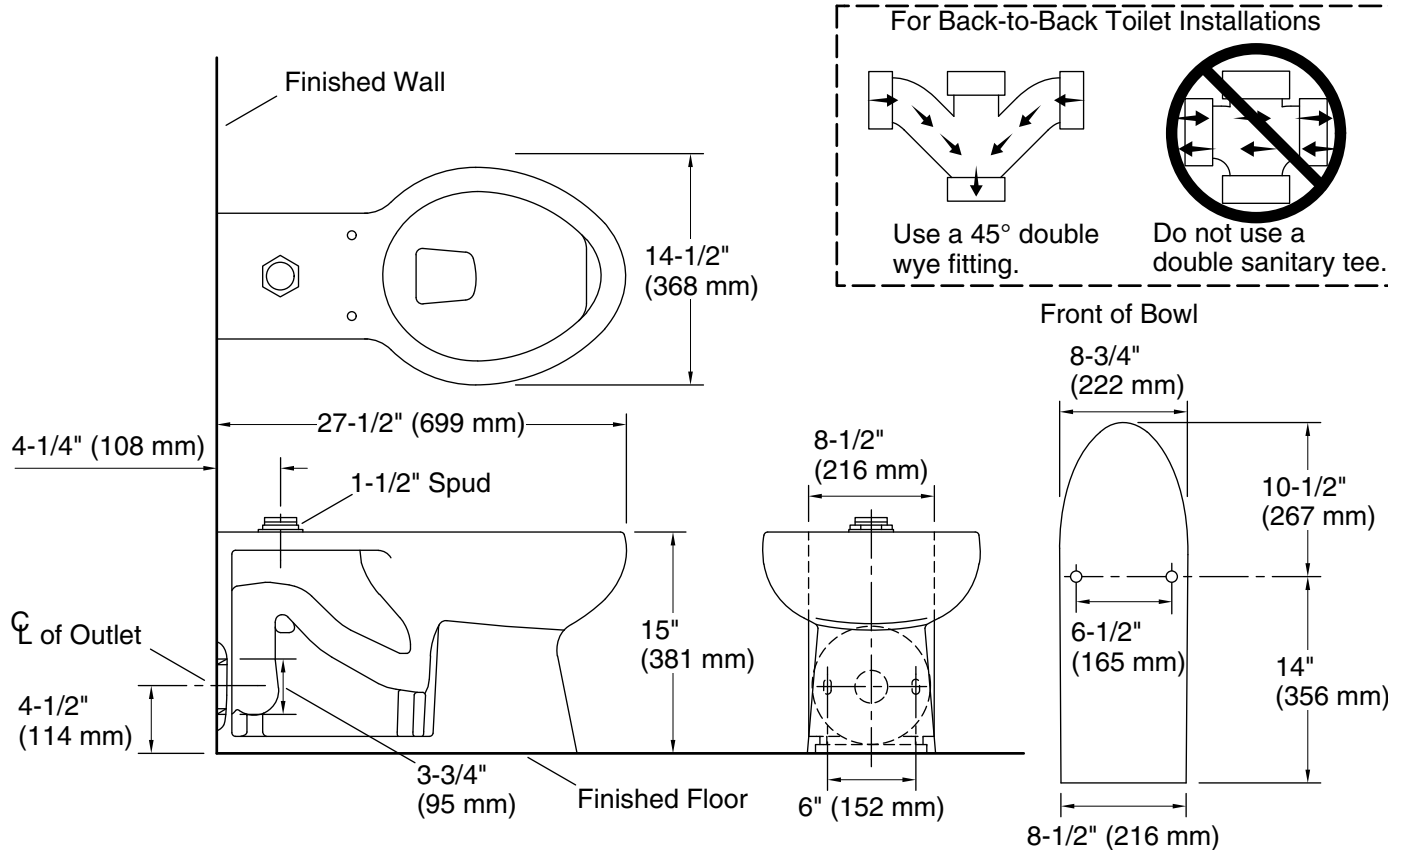

## Technical Information

All product dimensions are nominal.

|                       |                                |
|-----------------------|--------------------------------|
| Toilet type:          | One-piece, Floor-mount         |
| Waste Outlet:         | Wall                           |
| Bowl shape:           | Elongated                      |
| Spud size:            | 1-1/2", Inlet, Top             |
| Trap passageway:      | 2-1/2" (63 mm)                 |
| Water surface size:   | 11" x 9-1/2" (279 mm x 241 mm) |
| Rim to water surface: | 5-1/4" (133 mm)                |
| Rough-in:             | 4-1/2" (114 mm)                |
| Seat-mounting holes:  | 5-1/2" (140 mm)                |

## Fixture Supply Requirements

|                       |                    |
|-----------------------|--------------------|
| Min static pressure:  | 35 psi (241.3 kPa) |
| Max static pressure:  | 80 psi (551.6 kPa) |
| Min flowing pressure: | 25 psi (172.4 kPa) |
| Min flow rate:        | 25 gpm (94.6 lpm)  |

## Notes

Install this product according to the installation instructions.

Refer to manufacturer's instructions and local codes for flushometer requirements.

For back-to-back toilet installations: Use only a 45° double wye fitting.