



**Revel®**  
Frameless Pivot Shower Door  
**K-707551-D3**

### Features

- Vertical handle complements the contemporary style.
- CleanCoat® technology creates a protective barrier that repels water, prevents dirt and minerals from collecting, and makes it easier to remove hard water spots.

### Technology

- Frameless, 5/16" (8 mm) thick Frosted tempered glass door.
- Self-closing mechanism offers superior performance and security against water leakage.
- Ultra-low threshold creates easy entry and exit to the showering space.
- Maximum width adjustability.

### Installation

- Out-of-plumb adjustability simplifies installation.
- Door can be installed to open to the left or right to suit your bathroom layout.
- Pivot shower door.
- Not for use in hospitality.
- For residential use only.

### Recommended Products/Accessories

K-23723 Faucet cleaner

### Included Components

Additional Components:

Hardware kit



### Codes/Standards

ANSI Z97.1  
CPSC 16CFR 1201

### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

#### Color    Code    Description

	SHP	Bright Polished Silver
	ABZ	Anodized Dark Bronze
	BNK	Anodized Brushed Nickel


### Available Glass Options

#### Code    Description

D3	Frosted
----	---------



**Revel®**  
Frameless Pivot Shower Door  
**K-707551-D3**

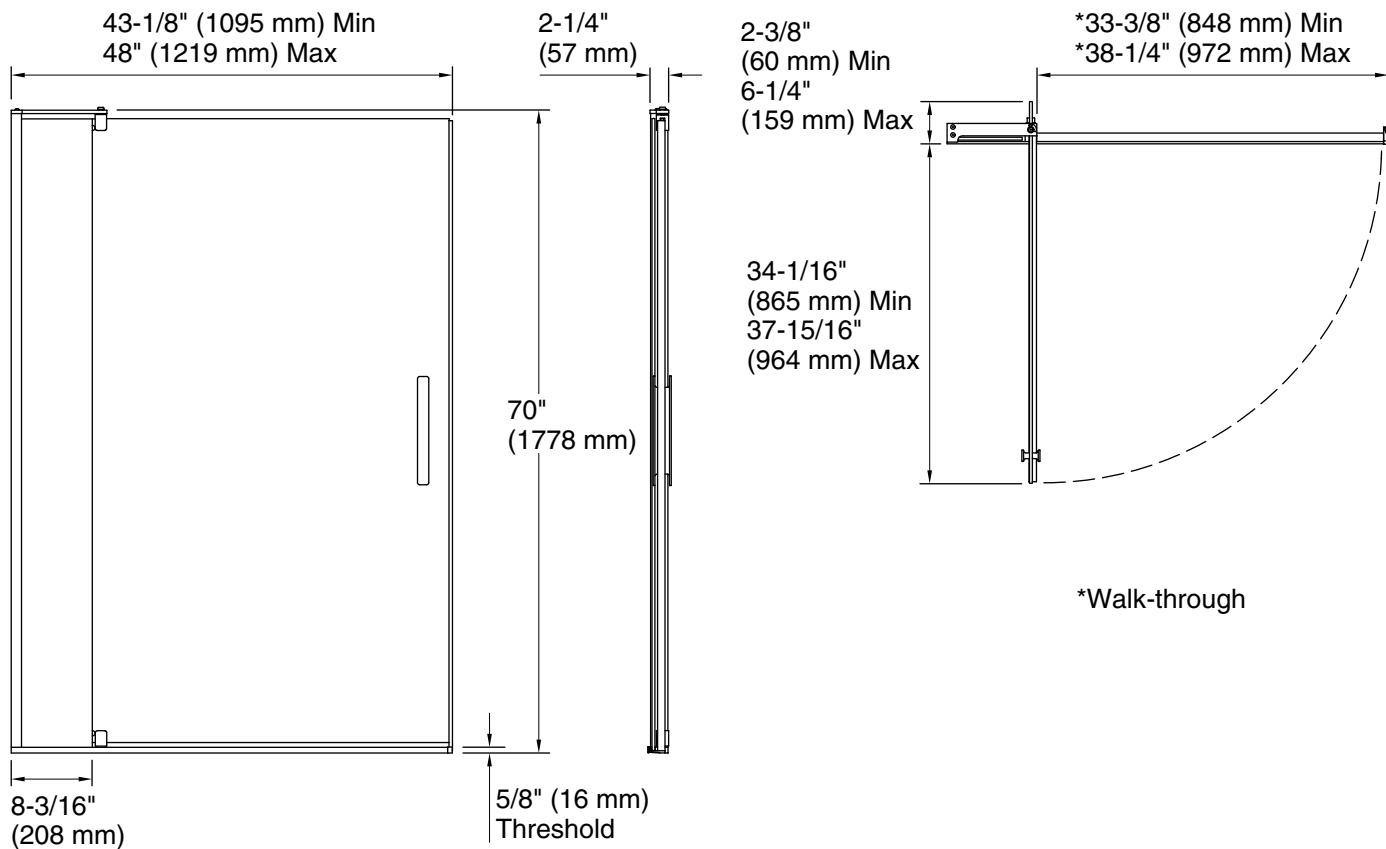

\*Walk-through

#### Technical Information

All product dimensions are nominal.

Installation type: For shower base installation  
Opening style: Pivot  
Opening Width - Min: 43-1/8" (1095 mm)  
Opening Width - Max: 48" (1219 mm)  
Walk-through - Min: 33-3/8" (848 mm)  
Walk-through - Max: 38-1/4" (972 mm)  
Base-To-Wall Radius – Max: 3/8" (10 mm)  
Glass thickness: 5/16" (8 mm)  
Glass coating: CleanCoat®

#### Notes

Install this product according to the installation guide.

Strike jamb is made of clear plastic and may not cover existing shower door holes.

NOTICE: The vertical opening should be a minimum of 74" (1880 mm) to allow clearance for installation.