

Composed® Single-handle bidet faucet K-73176-4

Features

- Metal construction.
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance.
- Temperature memory allows faucet to be turned on and off at any temperature setting.
- High-temperature limit setting for added safety.
- Flexible connections for easy installation.
- Complete range of faucets, accessories and showering components to coordinate a full bathroom.
- 2.2 gal/min (8.3 l/min) maximum flow rate [max at 60 psi.

Material

KOHLER finishes resist corrosion and tarnishing.

Installation

Single-hole mounting.

Recommended Products/Accessories

K-23726 Drain treatment K-23723 Faucet cleaner



Codes/Standards

ASME A112.18.1/CSA B125.1

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color Code Description

CP Polished Chrome
TT Vibrant Titanium



KOHLER, Faucets

Composed® Single-handle bidet faucet K-73176-4

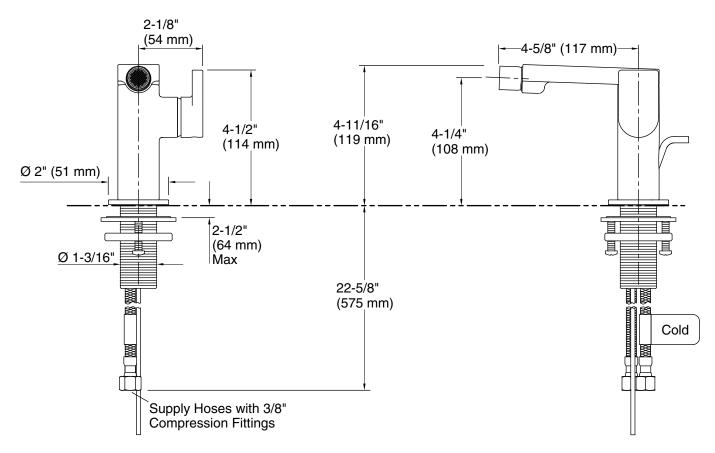

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: 2.2 gal/min (8.3 l/min)

Pressure: 60 psi (4.1 bar)

Valve body: Cast brass

Drain with overflow: Yes
Drain tailpiece Yes

included:

Spout:Spout reach: 4-5/8" (118 mm)

Notes

Install this product according to the installation guide.

