

Features

- Frameless, 3/8" (10 mm) thick Clear tempered glass.
- Frameless design emphasizes glass and creates a sleek, minimalist look.
- Full-length magnetic seal keeps door firmly closed, providing excellent water containment.
- Innovative "L" bracket secures the fixed panel in place and gives it a sturdy feel while also being unobtrusive to the showering space.
- Continuous 7/8" high aluminum bottom threshold.
- Back-to-back 11-1/2" (292.1 mm) vertical shower door pulls.
- Coordinates with other products in the Composed® collection.
- CleanCoat® nanotechnology provides a smooth, nonstick surface to help prevent buildup of water stains, bacteria and mildew on your glass, to make it easy to clean and keep it looking like new.

Material

- Anodized aluminum hardware prevents rusting or corrosion.

Installation

- Fits opening widths 57"–58-3/8" (1447.8–1482.7 mm).
- 1-3/8" (35 mm) width adjustment.
- 3/8" (10 mm) out-of-plumb adjustability per side allows for simpler installation.
- Door can be installed to open to the left or right to suit your bathroom layout.
- Product ships in two boxes, offering easy handling.
- For residential use only.
- Not for use in hospitality.

Recommended Products/Accessories

K-23723 Faucet cleaner

Included Components

Additional Components:

Hardware kit



Codes/Standards

ANSI Z97.1

CPSC 16CFR 1201

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------




SHP	Bright Polished Silver
-----	------------------------

Available Glass Options

Code	Description
------	-------------

L	Crystal Clear
---	---------------

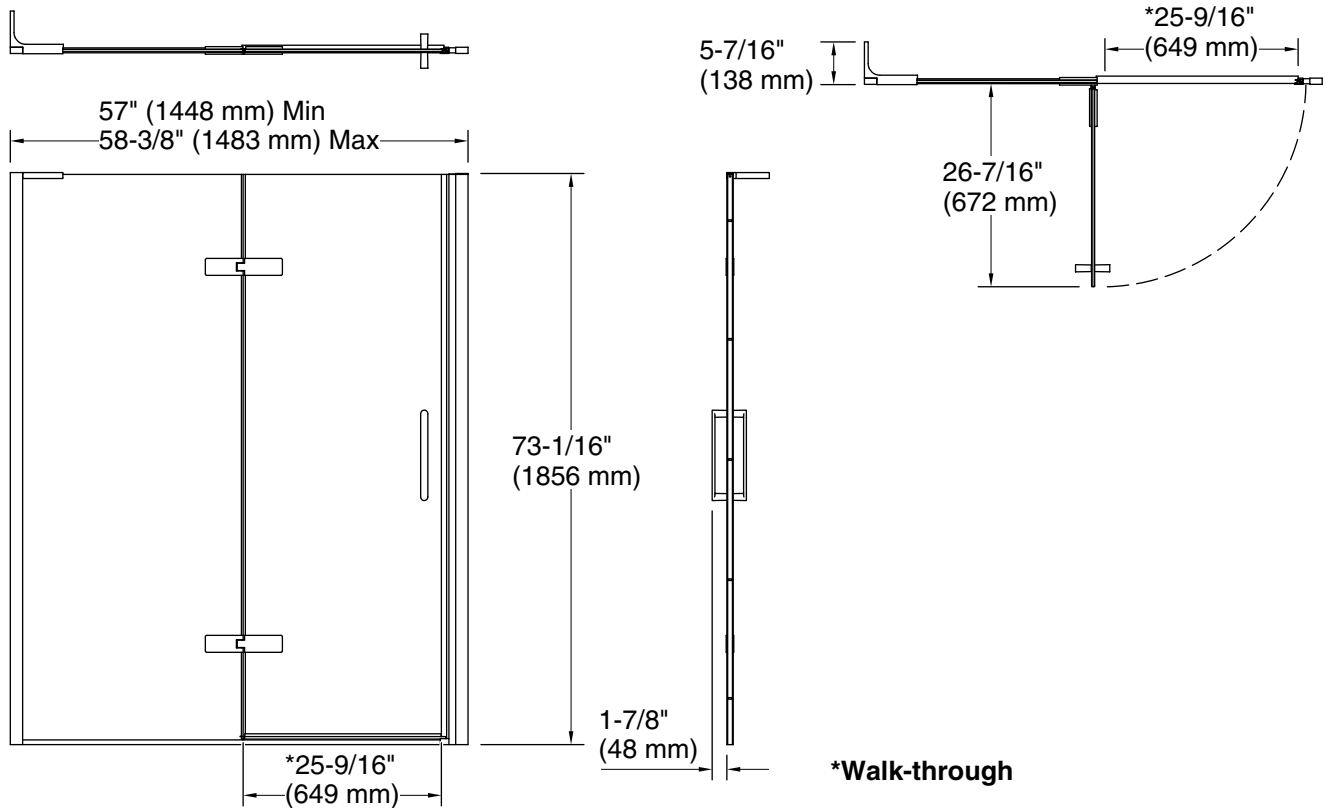

Technical Information

All product dimensions are nominal.

Installation type: For shower base installation

Opening Width - Min: 57" (1448 mm)

Opening Width - Max: 58-3/8" (1483 mm)

Walk-through - Min: 25-9/16" (649 mm)

Walk-through - Max: 25-9/16" (649 mm)

Base-To-Wall Radius 1/4" (6 mm)

– Max:

Glass thickness: 3/8" (10 mm)

Glass coating: CleanCoat®

Notes

Install this product according to the installation instructions.

The vertical opening should be a minimum of 75" (1905 mm) to allow for installation clearance.

***Walk-through**