



see what Delta can do™

# ACTIVTOUCH® SLIDE BAR HAND SHOWER

■ 9-Spray Setting Hand Shower

## FEATURES:

- Touch-Clean® Nozzles
- ActivTouch® Hand Shower

## STANDARD SPECIFICATIONS

- Max flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Certified dual neoperl check valves for backflow protection
- Three spray selection buttons for a simple one-handed operation
- Soft touch non-slip grip
- Hand held shower with nine spray settings – pause is a non-positive shut-off
- 60-82" (1524 mm - 2083 mm) stretchable metal hose
- Slide bar bracket for hands-free showering
- Slide bar w/adjustable slide (allows for adjustable shower height). Not to be used as a grab bar.

## WARRANTY


- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



## COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1 ◆
- ASME A112.18.3
- EPA WaterSense®


- ◆ Your Delta Faucet hand shower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3 and ASME A112.18.1/CSA B125.1. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.

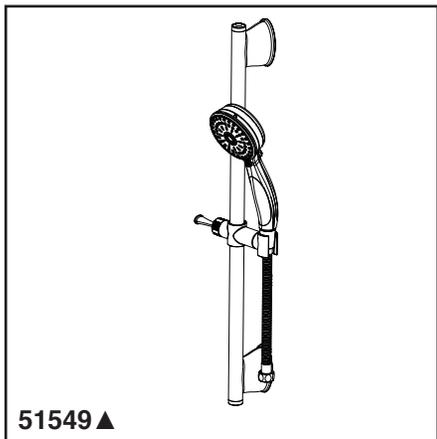

51549▲

Submitted Model No.: \_\_\_\_\_

Specific Features: \_\_\_\_\_

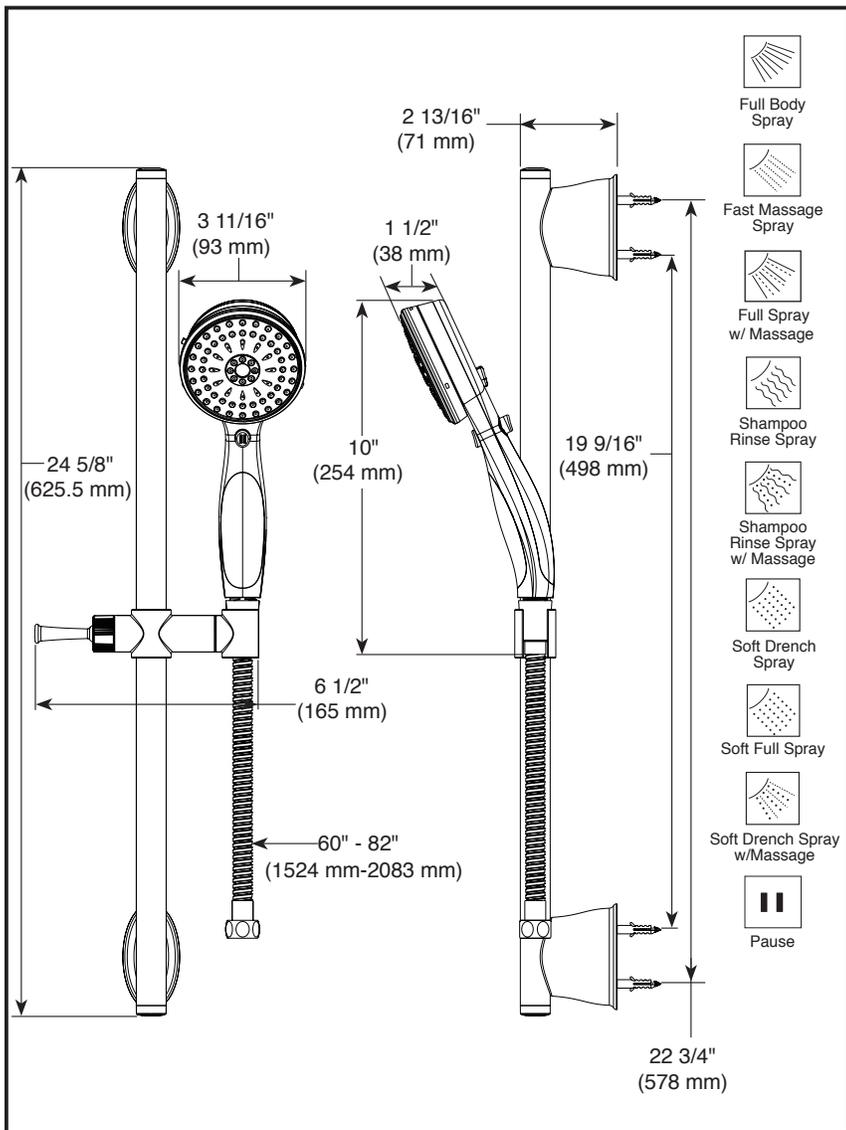

▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.deltafaucet.com](http://www.deltafaucet.com) for finish options and product availability.