

### Features

- 1/2" NPT connections.
- 2.5 gallons (9.5 L) per minute maximum flow rate at 80 psi (552kPA)
- Available as a 54-nozzle with soothing spray [K-8002] or a 22-nozzle with stimulating spray [K-8003]
- Low-profile design complements any décor.
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup.

### Recommended Products/Accessories

K-8002 54-nozzle body spray  
K-8003 22-Nozzle Body Spray  
K-23723 Faucet cleaner



### Codes/Standards












ASME A112.18.1/CSA B125.1  
DOE - Energy Policy Act 1992


### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	AF	Vibrant® French Gold
	BGD	Vibrant® Moderne Brushed Gold
	G	Brushed Chrome
	BN	Vibrant® Brushed Nickel
	BV	Vibrant® Brushed Bronze
	2BZ	Oil-Rubbed Bronze
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne Brass
	TT	Vibrant Titanium

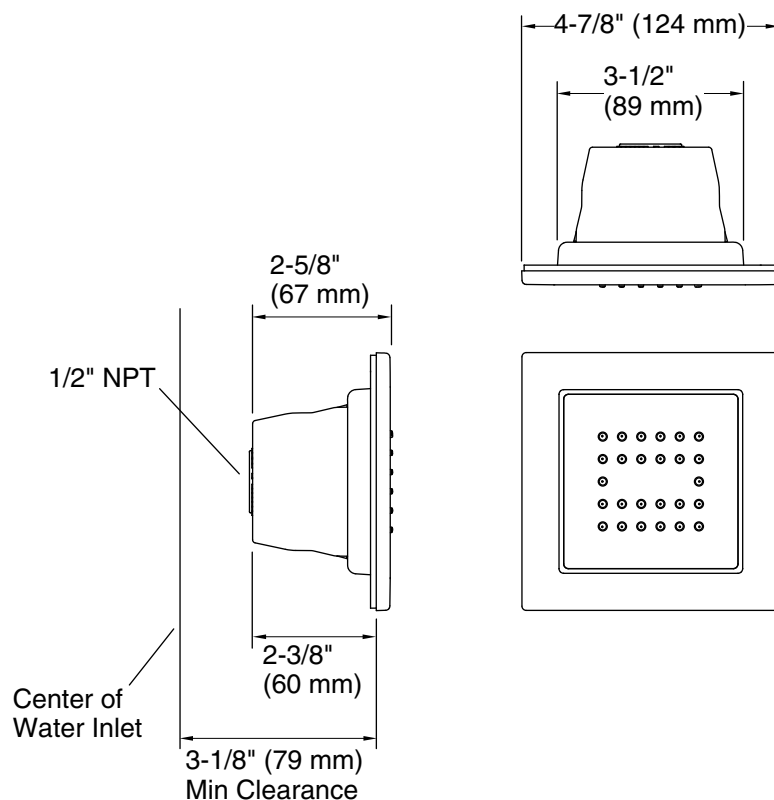

### Technical Information

All product dimensions are nominal.

### Notes

Install this product according to the installation instructions.