

UNIQUE

TWIST

CLICK

LOCK

Simple to install with the innovative 'Twist, Click & Lock mechanism. The TF1 Total Filter is supplied complete so no need for additional parts or fittings.

1. Using a flat end screwdriver in the recess shown, gently lever the locking clip into the 'unlock' position.



2. Pull the inlet/outlet port approximately 3mm away from the body to allow rotation to the required position.



3. Push the inlet/outlet port back towards the body of the unit to prevent further rotation.



4. Push the locking clip securely back into the 'lock' position.



INNOVATIVE Filter Fluid+ Protector

What is Filter Fluid+ Protector?

An innovative inhibitor and dispersant package that detects and delivers sludge and debris to any system filter.

- Protects the system against corrosion and scale formation
- Perfect partner to the TF1 Filter range
- Increases the effectiveness of any filter
- Maximises the ongoing cleaning process by delivering any remaining system debris to a filter



Smart intuitive
technology



Award-winning design
TF1 TOTAL FILTER

0216US/01-102

A NAME YOU CAN TRUST

Extensive technical research and customer feedback has led to the development of the improved Fernox **TF1 Total Filter**.

The **TF1 Total Filter** offers installers the complete solution.



Hydrocyclonic action and specially designed magnet assemblies to remove, trap and contain both magnetic and non-magnetic debris



Award-winning technology



Quick and easy to install – saving time on-site



'Twist, click & lock' technology makes installation even easier – no 'O' rings, 1" sweat valve available



Cleaned in seconds – with no need to dismantle the filter




Supplied with best quality valves as standard

TF1 TOTAL FILTER



CLEANING THE TF1 TOTAL FILTER

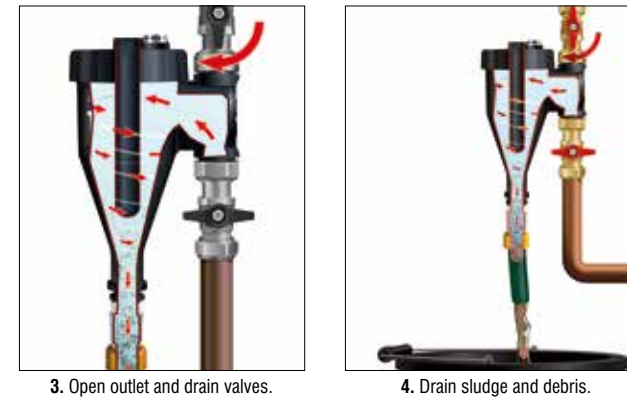

No need to remove lid collar to clean the filter.