



Kennon®
Top-/Under-Mount Kitchen Sink
K-8185-1

Features

- 36" minimum base cabinet width for under-mount or top-mount installation.
- Double-equal bowls.
- 9" (229 mm) depth provides generous workspace.
- Includes 1 faucet hole on rear deck (3 more faucet holes available for knockout with ball-peen hammer & punch).
- Includes cutout templates.
- Includes K-5662 bottom sink rack.
- Optional K-5186 bottom basic rack(sold separately)



Material

- KOHLER Neoroc® composite is durable and built to withstand day-to-day cleaning tasks.
- Matte finish offers rich, dimensional color.
- Solid color throughout the sink.
- Heat resistant up to 750°F.
- Scratch, stain, chip, and thermal-shock resistant.

Codes/Standards

CSA B45.5/IAPMO Z124

Installation

- Top-mount or undermount.

KOHLER® Neoroc® Sinks Lifetime Limited Warranty

See website for detailed warranty information.

Recommended Products/Accessories

- K-8801 Sink Strainer
- K-8799 Sink Strainer
- K-23726 Drain treatment
- K-23730 Neoroc® cleaner

Optional Products/Accessories

- K-5186 Right-Bowl Sink Rack
- K-11352 Disposal Flange with Stopper
- K-9000 P-Trap

Included Components

Additional Components:

- K-5662

Available Colors/Finishes


Color tiles intended for reference only.

Color Code Description

	CM7	Matte Graphite
	CM1	Matte Black
	CM2	Matte Brown
	CM3	Matte Taupe



Kennon®
Top-/Under-Mount Kitchen Sink
K-8185-1

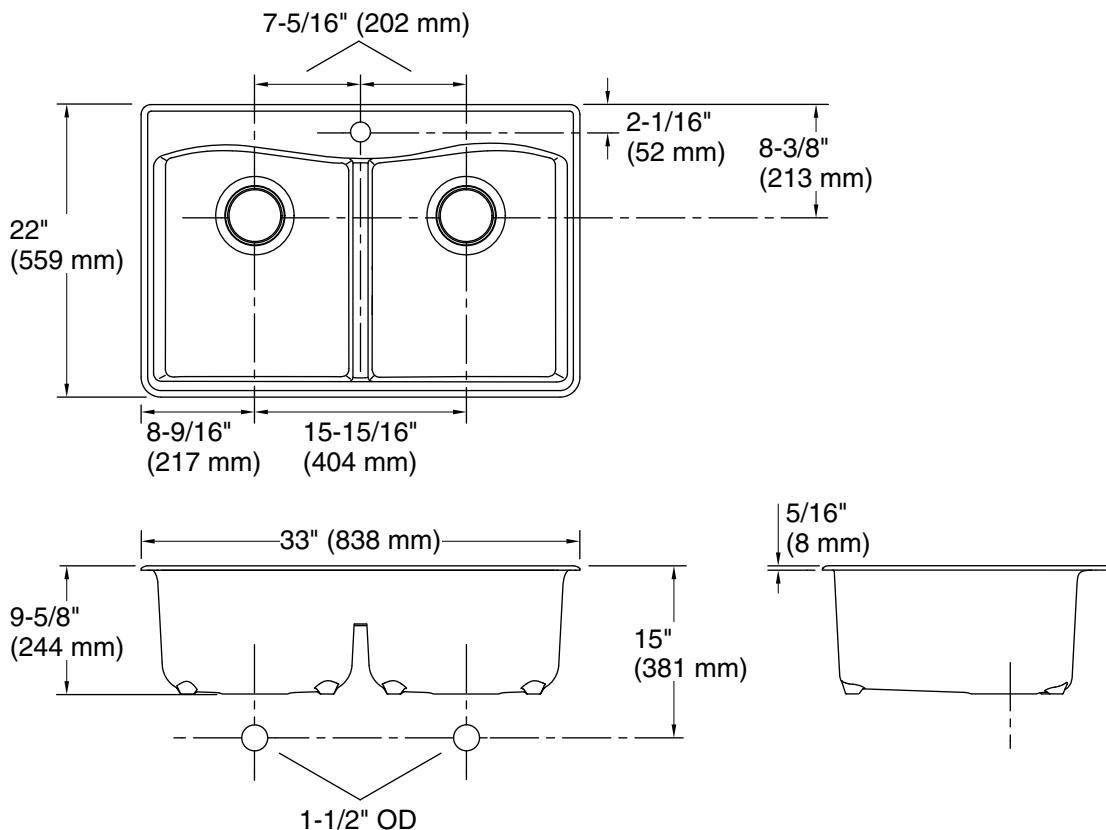

Technical Information

All product dimensions are nominal.

Installation: Under-mount, Top-mount

Min. base cabinet width: 36" (914 mm)

Bowl area (Left): Length: 14-9/16" (370 mm)
Width: 16-13/16" (427 mm)
Bowl depth: 9" (229 mm)
Water depth: 9" (229 mm)

Bowl area: Length: 14-9/16" (370 mm)
Width: 16-13/16" (427 mm)
Bowl depth: 9" (229 mm)
Water depth: 9" (229 mm)

Faucet hole spacing: 4" (102 mm)

Drain hole: 3-7/8" (98 mm)

Template: 1281758-7, required, included

Notes

Install this product according to the installation instructions.