

Features

- Two-handle gooseneck bathroom sink faucet.
- 3-11/16" (94 mm) gooseneck spout with rosespray.
- 7-5/16" (186 mm) wall-to-spout outlet.
- 1.2 gpm (4.5 l/min) maximum flow rate.
- Lever handles with red/blue indexing (ADA compliant with correct installation).
- Optional decorative handle covers.
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance.
- Less drain.
- Adjustable flanges.
- External NPT connections.
- Low Lead-Safe Drinking Water Act (SDWA) compliant.

Material

- Brass construction.

Installation

- 3" vertical wall-mount installation.
- Pairs with the Brockway wall-mounted wash sink.

Recommended Products/Accessories

- K-3200 Utility Sink
- K-3202 Utility Sink
- K-3203 Utility Sink
- K-23723 Faucet cleaner



ADA **CSA B651** **OBC**

Codes/Standards

ASME A112.18.1/CSA B125.1

NSF/ANSI 61

NSF/ANSI 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

CSA B651

OBC

KOHLER® One-Year Limited Warranty


See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description

	CP	Polished Chrome
	SR	Vibrant Bright Nickel

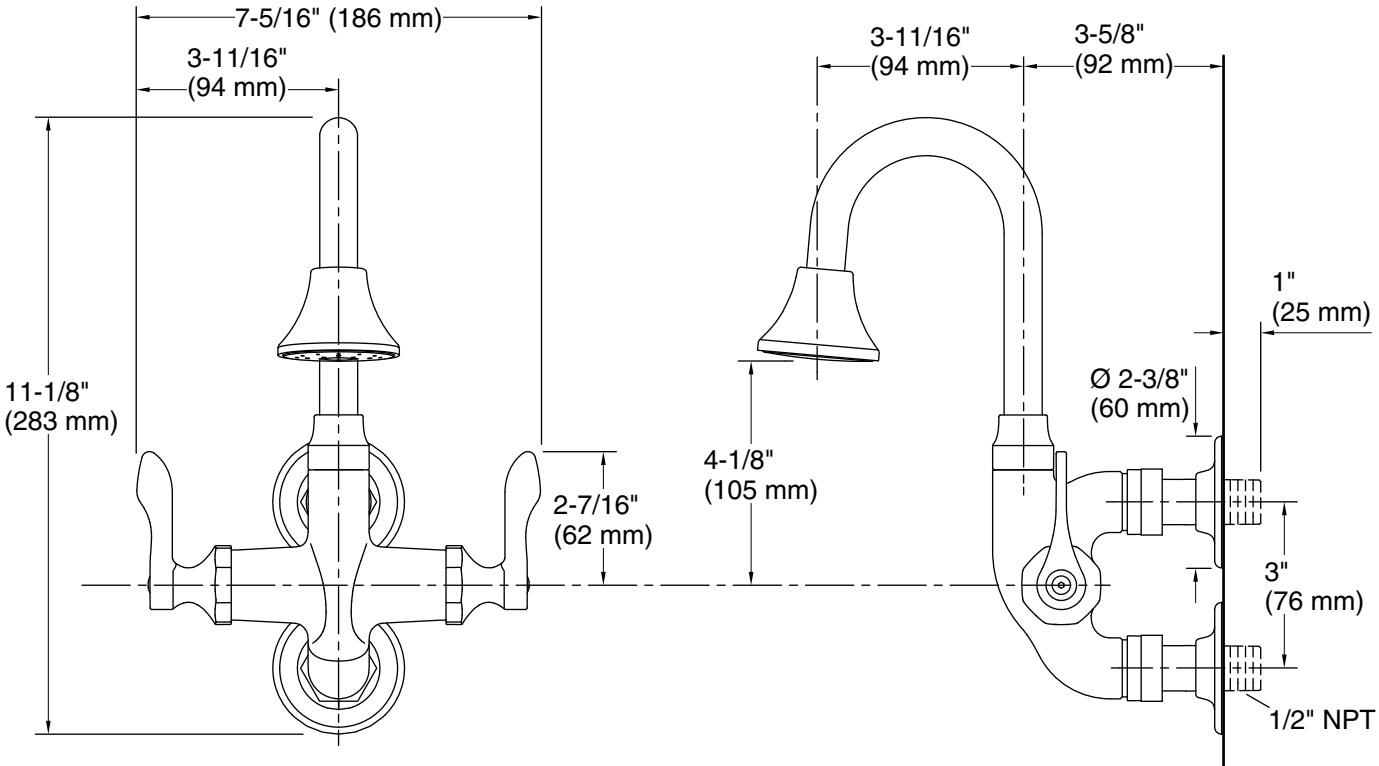

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)
Pressure: 60 psi (4.1 bar)

Spout:

Spout reach: 3-11/16" (93 mm)

Notes

Install this product according to the installation instructions.

ADA compliant for handles only.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.