



**ELEVATION**

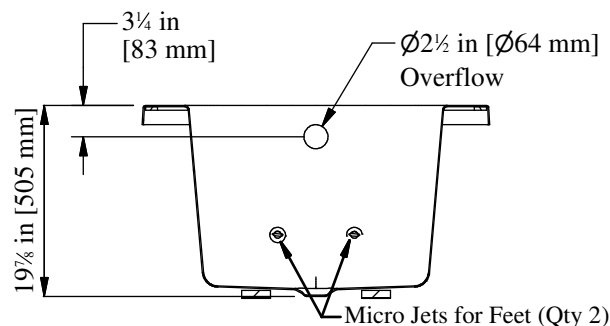

**SECTION A-A**

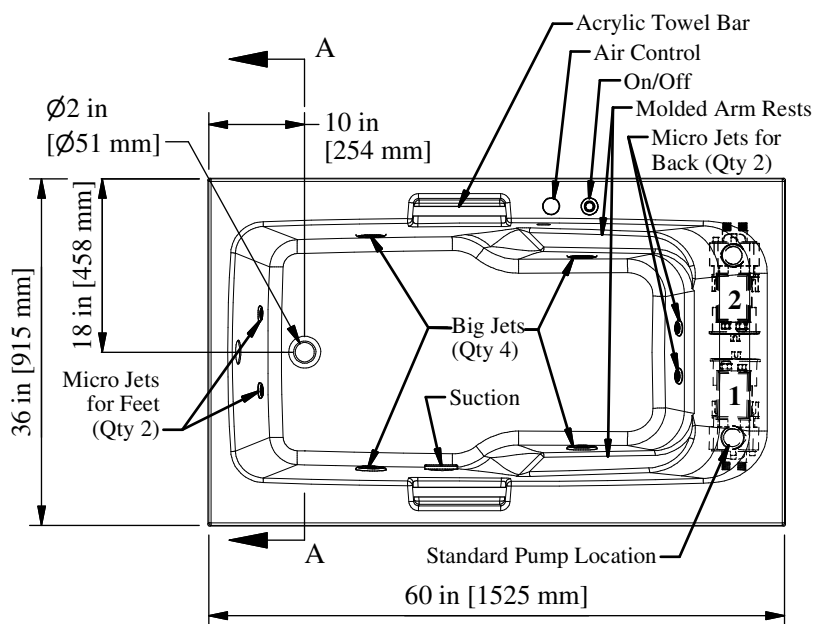

**PLAN**

**60" [1524mm] Acrylic Drop-In Bathtub w/ Molded Arm Rests**

## PRODUCT SPECIFICATIONS:

- Certified to meet CSA B45.5/IAPMO Z124 Standard.
- Clarion Bathware acrylic products are thermoformed from continuous cast acrylic sheet into a one piece seamless unit.
- When installing this whirlpool, an access area should be provided near the location of the whirlpool pump for future access. An access area is required by many local, state & federal building codes.
- Recommended access area dimensions:  
W-20" [508mm] x H-15" [381mm]
- A tiling flange kit is available (Model TFK-1).
- Reinforced & slip resistant floor.
- Integral 2" [51mm] rolled edge for drop-in installation.
- Factory drilled 2 1/2" [64mm] overflow.
- Molded arm rests
- Bathwell Dimensions (At Top): W-53 1/2" [1359mm]  
D-26 1/2" [673mm]  
H-19" [483mm]
- Bathwell Dimensions (At Bottom): W-39 1/2" [1003mm]  
D-22" [559mm]
- Bathwell Capacity (At Overflow): 60 Gallons [227L]
- Water Level (At Overflow): 16" [406mm]
- All dimensions +/- 1/2" [12.8mm]
- Clarion Bathware reserves the right to change design and/or dimensions.

## AD416062T:8

60" [1524mm] Acrylic Drop-In Bathtub w/ Molded Arm Rests & 8 Jet Whirlpool Package

**Clarion**  
BATHWARE  
44 Amsler Ave.  
Shippensburg, PA 16254

Phone: (814) 226-5374  
Toll Free: (800) 576-9228  
Fax: (814) 226-0730  
www.clarionbathware.com

Mold Fabrication will not begin until approved drawing is received.  
Standard mold production is (\_\_\_\_ weeks) unless quoted otherwise.

Signatures For Approval:

Date:

Customer: \_\_\_\_\_

Clarion Engineer: \_\_\_\_\_

Clarion SVP of Sales: \_\_\_\_\_

DWG. #  
AD416062T-CUT

Dwg. By: CAL  
Date: 6/1/2021