

**Features**

- Two handles offer separate control of hot and cold water.
- 1.2 gpm (4.5 lpm) maximum flow rate at 60 psi (4.14 bar).
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance.

**Material**

- Premium metal construction for durability and reliability.
- KOHLER finishes resist corrosion and tarnishing.

**Installation**

- Coordinates with Pitch® bath and shower trim.
- Centerset.

**Recommended Products/Accessories**

K-23726 Drain treatment  
K-23723 Faucet cleaner

**ADA** **CSA B651** **OBC****Codes/Standards**

ASME A112.18.1/CSA B125.1  
NSF/ANSI 61  
NSF/ANSI 372  
All applicable US Federal and State material regulations  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC

**KOHLER® Faucet Lifetime Limited Warranty**


See website for detailed warranty information.

**Available Colors/Finishes**

*Color tiles intended for reference only.*

**Color** **Code** **Description**

CP	Polished Chrome
BN	Vibrant® Brushed Nickel
BL	Matte Black

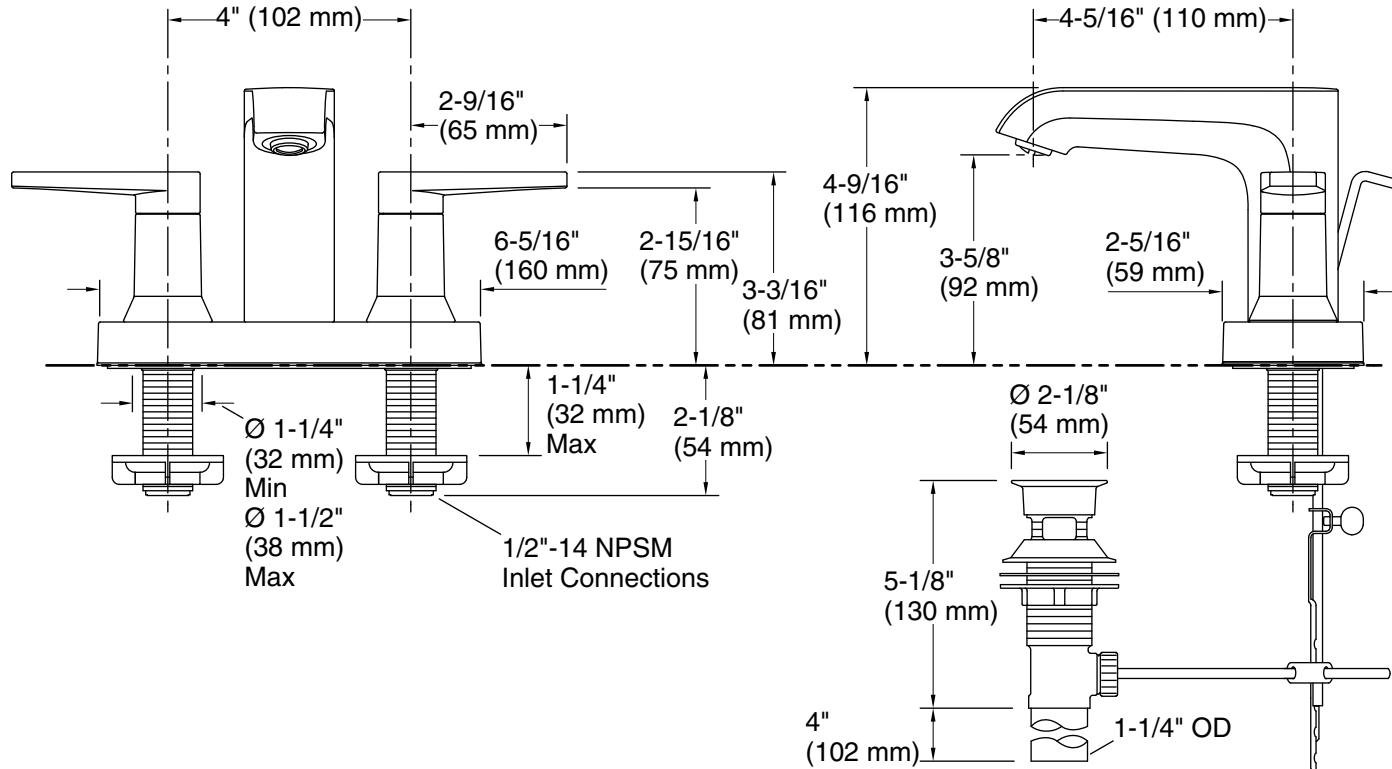

### Technical Information

All product dimensions are nominal.

#### Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)  
Pressure: 60 psi (4.1 bar)

#### Spout:

Spout reach: 4-5/16" (110 mm)

### Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.