



**Sunstruck®**  
65-1/2" x 35-1/2" oval freestanding bath  
**K-6369**

### Features

- Freestanding design creates a striking focal point in your bathing area.
- Oval-shaped basin offers a graceful and spacious bathing experience.
- Integral lumbar support on both ends.
- 16-inch bathing depth offers a deep soaking experience.
- Wide deck along one side simplifies installation and provides support for getting in and out of bath.
- Fluted shroud.
- Textured bottom surface.
- Center drain.

### Material

- Acrylic.

### Installation

- Freestanding.

### Recommended Products/Accessories

K-37383 Rough-in cable bath drain, PVC, 30" cable with tubing  
K-37386 rough-in cable drain, PVC, 30" cable  
K-7265 Brass toe tap bath drain  
K-24916 Wireless Music Kit  
K-T37391 Rotary-turn bath drain trim  
K-T37392 Rotary-turn bath drain trim  
K-T37393 Rotary-turn bath drain trim  
K-T37394 Rotary-turn bath drain trim  
K-T37395 Bath drain trim  
K-T37396 Push-button bath drain trim  
K-T37397 Push-button bath drain trim  
K-23726 Drain treatment  
K-23732 Tub & shower cleaner



### Codes/Standards



CSA B45.5/IAPMO Z124

### KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty


See website for detailed warranty information.



### Available Colors/Finishes

*Color tiles intended for reference only.*


Color	Code	Description
	0	White
	96	Biscuit

No change in measurements if connected with drain illustrated. (K-37385)

 Recommended Faucet Location

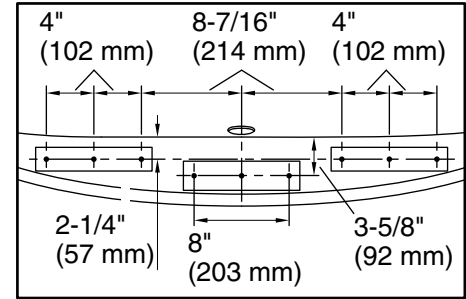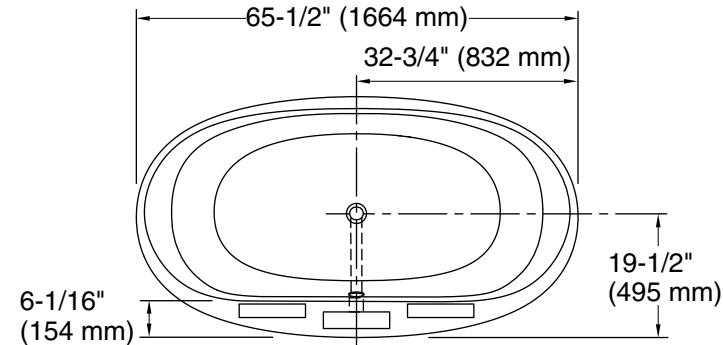

Recommended Faucet Hole Location

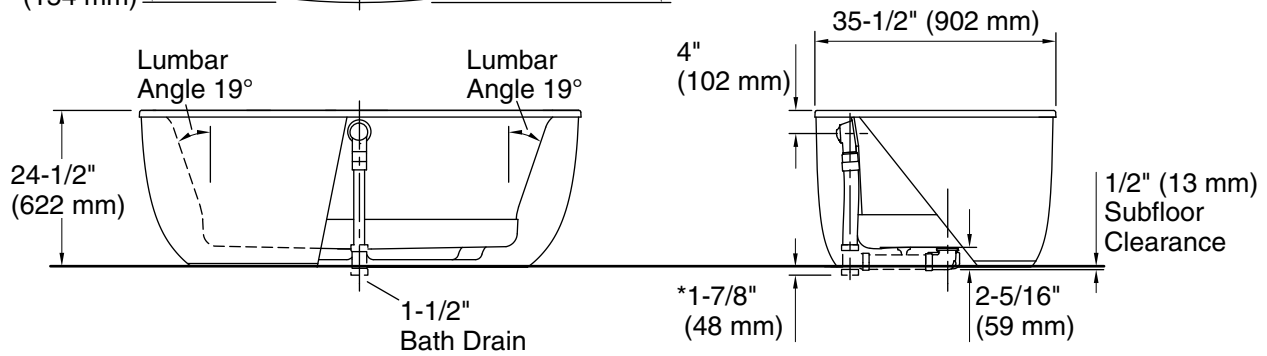

\*Allow for appropriate clearance in subfloor for drain tee clearance.  
Note: Horizontal PVC pipe and tee shown, not included.

## Technical Information

All product dimensions are nominal.

Installation:	Freestanding
Basin area, bottom:	45-3/4" x 24-7/8" (1162 mm x 632 mm)
Basin area, top:	54-7/8" x 29-3/16" (1394 mm x 741 mm)
Weight:	110 lbs (49.9 kg)
Minimum floor load:	40.4 lbs/ft <sup>2</sup> (197.3 kg/m <sup>2</sup> )
Water depth:	16" (406 mm)
Water capacity:	72.6 gal (274.8 L)
Template:	Footprint, 1245667, not required, not included

## Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Do not support the load weight of the bath by the rim.

If installing a rim-mount faucet, make sure there is no interference above or below the deck before drilling any holes.