



BIS starQuick® System

Product Specification

BIS starQuick® System

25/50 Plenum Rated

BIS starQuick® Clamp + BIS starQuick® Universal Rail Adaptor

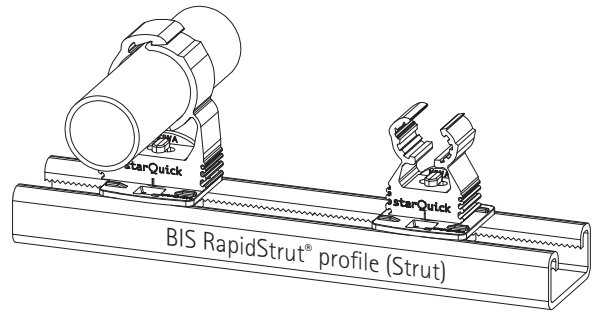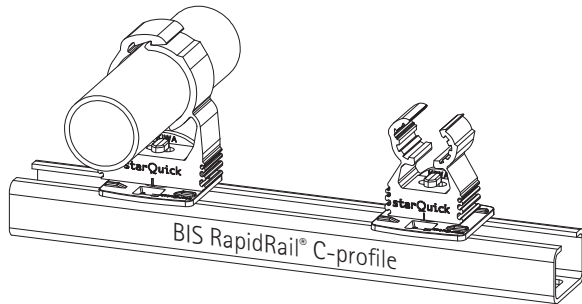


Specification:

The BIS starQuick® System is a flame and smoke rated clamp compatible for use with Copper, Iron Pipe, PEX, CPVC, PVC, Conduit, Wire, Cable and more. Supports 1/4" CTS up to 2" IPS tubing sizes. When paired with the Universal Rail Adaptor, BIS starQuick® Clamps mount easily to Strut or BIS RapidRail® C-profile. Material meets ASTM E-84 25/50 Flame/Smoke rating.


Product Information:

- Material: PA-6 Nylon - Grey
- Temperature range: -40° F to 200° F (constant), 260° F (peak)
- Load rating: see Chart
- Meets ASTM E-84 25/50 plenum rating
- UV Stabilized
- UL, UPC / IAPMO listed

BIS starQuick® Clamp (085 4 0XX)

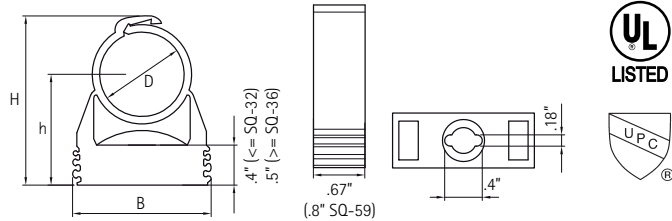

BIS starQuick® Universal Rail Adaptor (085 4 332)

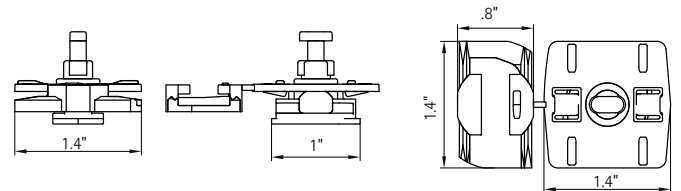

Part No.	Type	D (mm)	IP (")	CT (")	B (")	H (")	D (")	Fa,z (lbs)	Fb,z (lbs)
085 4 010	SQ-10	10 - 12	-	1/4	1.1	1.3	0.91	38	112
085 4 012	SQ-12	12 - 14	1/4	3/8	1.1	1.3	0.91	40	123
085 4 015	SQ-15	14 - 16	-	1/2	1.1	1.4	0.94	45	134
085 4 018	SQ-17	16 - 20	3/8	5/8	1.1	1.6	1.00	51	157
085 4 022	SQ-20	20 - 23	1/2	3/4	1.1	1.7	1.10	60	179
085 4 028	SQ-25	24 - 28	3/4	-	1.6	2.0	1.20	63	191
085 4 031	SQ-28	28 - 32	-	1	1.6	2.1	1.30	67	202
085 4 035	SQ-32	32 - 35	1	1 1/4	1.7	2.2	1.30	74	224
085 4 038	SQ-36	35 - 40	-	-	1.9	2.6	1.60	83	247
085 4 042	SQ-40	40 - 44	1 1/4	1 1/2	2.0	2.8	1.70	90	269
085 4 050	SQ-47	44 - 50	-	-	2.2	3.0	1.80	96	292
085 4 054	SQ-51	48 - 55	1 1/2	2	2.5	3.2	1.90	105	314
085 4 063	SQ-59	59 - 65	2	-	2.9	3.7	2.20	112	337
085 4 332	Universal Rail Adaptor								

Fa = maximum allowed load, Fb = breaking load

Product Submittal

Job Name:	
Date:	
Part No.	Qty:
Architect / Owner:	
Contractor:	
Notes:	