

## 2.5 gpm multifunction handshower kit K-22176

### Features

- Includes Bancroft<sup>®</sup> 2.5-gpm multifunction handshower, 60" metal hose, 30" slidebar and traditional slidebar trim.
- Advanced spray engine provides three experiences: full coverage, pulsating massage, and silk spray.
- Full coverage spray produces an encompassing spray ideal for everyday use.
- Pulsating massage spray targets sore muscles to ease away aches and pains.
- Silk spray releases a dense, luxurious spray ideal for rinsing.
- Thumb tab allows for a smooth transition between sprays.
- Combination of balance, weight, grip, and angle makes this handshower comfortable and easy to use.
- MasterClean<sup>™</sup> sprayface features an easy-to-clean surface that withstands mineral buildup.
- 2.5 gpm (9.5 lpm) maximum flow rate.
- 30" slidebar features adjustable mounting brackets for installation flexibility.
- Coordinates with Bancroft and Devonshire faucets and accessories.
- Features a non-positive shut off: water-saving pause mode to OBC temporarily reduce water flow.

### Material

KOHLER finishes resist corrosion and tarnishing.

### **Recommended Products/Accessories**

K-23723 Faucet cleaner





### Codes/Standards ASME A112.18.1/CSA B125.1

DOE - Energy Policy Act 1992 ADA ICC/ANSI A117.1 OBC

# KOHLER<sup>®</sup> Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### **Available Colors/Finishes**

Color tiles intended for reference only.


| Color | Code | Description             |
|-------|------|-------------------------|
|       | CP   | Polished Chrome         |
|       | BN   | Vibrant® Brushed Nickel |
|       | 2BZ  | Oil-Rubbed Bronze       |



### **Bancroft**®



2.5 gpm multifunction handshower kit K-22176

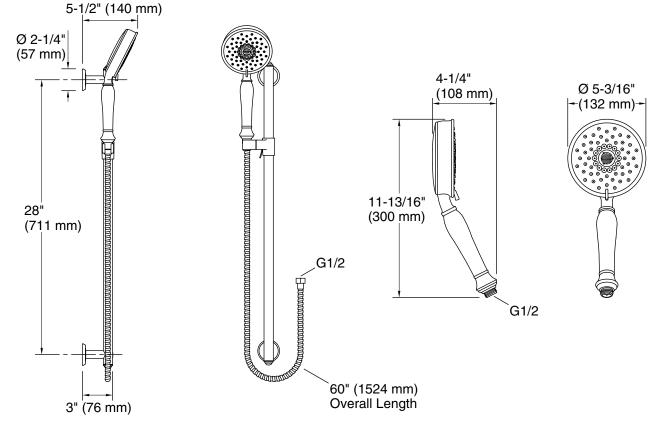

### **Technical Information**

All product dimensions are nominal.

### Handshower:

Rated maximum 2.5 gal/min (9.5 l/min) flow:

Pressure: 45 psi (3.1 bar)

### **Pressure and Supply Requirements**

Fixture pressure min 45 psi (310.3 kPa) (static):

### **Fixture Supply Requirements**

| Min static pressure: | 45 psi (310.3 kPa) |
|----------------------|--------------------|
| Min flow rate:       | 2.5 gpm (9.5 lpm)  |

#### Notes

Install this product according to the installation instructions.

IMPORTANT! The slide bar must be mounted to stud framing supports at both the top and bottom mounting locations. Plastic wall anchors will not support the slide bar. Do not use or depend on plastic wall anchors to attach the slide bar.

Plumbing codes may require that an atmospheric vacuum breaker be installed in-line to handshowers. Consult with local codes.

ADA, OBC compliant when installed to the specific requirements of these regulations.

