

# OC-S-63 63-1/4" roll-in shower base 62061100



#### **Features**

- ½" (12.7 mm) threshold.
- Swirl-gloss finish with molded-in textured floor.
- Center drain.
- Suitable for tile-down applications.
- Type A and B multifamily dwellings: Showers will comply with ICC ANSI A117.1 Standards section 1104.11.3.1.3.3 and the Fair Housing Act Accessibly Guidelines when installed per Requirement 6 (Reinforced walls for grab bars) of the Accessibility Guidelines.

#### Material

 Made from solid Vikrell® material for strength, durability, and lasting beauty.

### **Recommended Products/Accessories**

K-23726 Drain treatment K-23733 Vikrell® cleaner



ADA

#### Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 ADA

# Warranty – Bathing Fixtures (and) Kitchen and Utility Sinks Made of Solid Vikrell® Material


See website for detailed warranty information.

## **Available Colors/Finishes**

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	<b>KOHLER Biscuit</b>



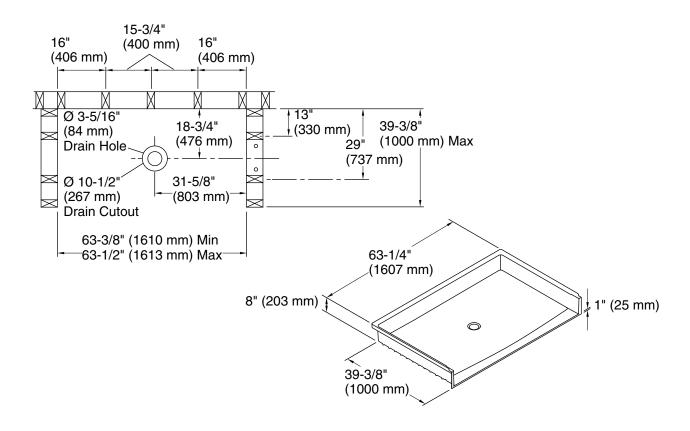

#### **Technical Information**

All product dimensions are nominal.

Installation: Three-wall alcove

Drain location: Center

#### **Notes**

Install this product according to the installation instructions.

1/2" minimum finished floor thickness required. Studs should be positioned roughly as shown. Drain cutout in subfloor to be 10-1/2" (267 mm) per rough-in illustration as shown to allow the backside of the drain to sit below the subfloor surface.

ADA compliant when installed to the specific requirements of these regulations.