



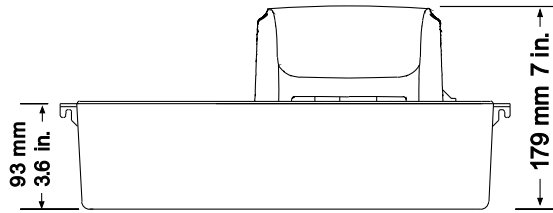

# NT1-P Condensate Neutralization Tank With Pump Technical Information

## DIMENSIONS :

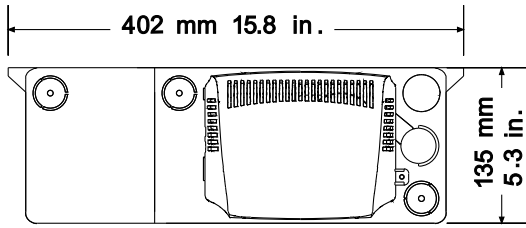

Pump is certified to CAN/CSA STD C22.2 No. 108-1

Conforms to UL STD 778

## WEIGHT :

3.9 kg, 8.5 lbs. (dry weight with Media)


## ELECTRICAL :

120VAC 60Hz, 87W, 0.89 amps

## PUMP PERFORMANCE :

Submerged pump is self-priming  
282 l/hr (74 gph) @ free flow  
123 l/hr (32 gph) @ 6 m (20ft)

### NT1-P Pump Curve

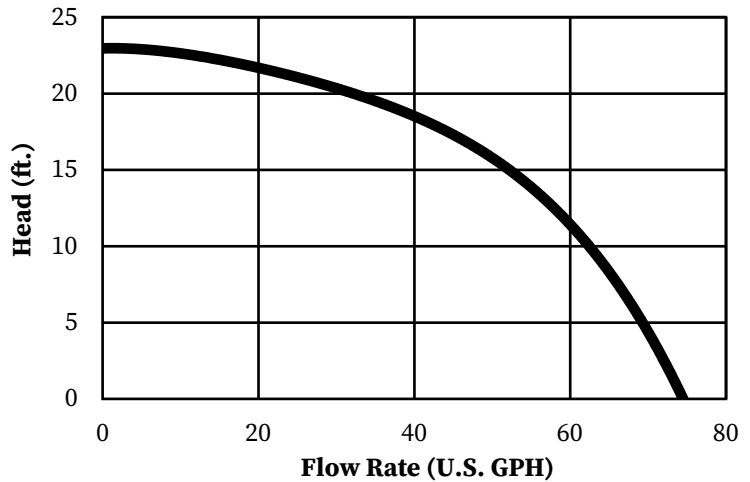

## SPECIFICATION :

The condensate neutralization tank with pump shall be AXIOM INDUSTRIES LTD. model NT1-P. System shall include 4 litre (1 U.S. gallon) tank and lid made from SAN, pump with thermal cut-out and electrically; low level float switch; high level float switch for the remote alarm system; check valve; 20 feet of 3/8" vinyl tubing, 3/4" " FNPT inlet connection; 6 ft. long power cord. power supply 110/60/0.6A. Comes with 1.2 kg (2.7 lbs) of Axiom's LipHter<sup>+</sup> neutralization media.

## OPTIONAL ACCESSORIES :

- NM-1P** -- Replacement LipHter<sup>+</sup> neutralization media.
- RIA10-1-SAA** -- High level alarm panel provides audible and visual alarm for high level information
- NM-1BULK** -- Replacement LipHter<sup>+</sup> neutralization media (Up to 10 Refills)

## LIMITED WARRANTY :

The "NT1-P" is warranted against defects in materials and workmanship for two years.



Project \_\_\_\_\_  
 Consultant \_\_\_\_\_  
 Unit Tag \_\_\_\_\_

Location \_\_\_\_\_  
 Contractor \_\_\_\_\_  
 Sales Agent \_\_\_\_\_