



# Finesse™

## Frameless sliding shower door

### 5475-59

#### Features

- Frameless.
- 1/4" (6 mm) thick tempered glass.
- CleanCoat® technology creates a protective barrier that repels water, prevents dirt and minerals from collecting, and makes it easier to remove hard water spots.
- Interior and exterior towel bars complete the look of this door.

#### Material

- Anodized aluminum prevents rust and corrosion.

#### Technology

- Tempered glass ensures maximum safety and durability.

#### Installation

- Out-of-plumb adjustability simplifies installation.
- Not for use in hospitality.
- For residential use only.

#### Recommended Products/Accessories

K-23723 Faucet cleaner

#### Included Components

Additional Components:  
Hardware kit



#### Codes/Standards

ANSI Z97.1

CPSC 16CFR 1201

#### STERLING® Warranty - Bath and Shower Doors

See website for detailed warranty information.

#### Available Colors/Finishes

*Color tiles intended for reference only.*


| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|

|   |     |             |
|---|-----|-------------|
|  | DR  | Deep Bronze |
|  | N   | Nickel      |
|  | PBL | Matte Black |
|  | S   | Silver      |

#### Available Glass Options

| Code | Description |
|------|-------------|
|------|-------------|

|  |            |
|--|------------|
|  | Boxwood™   |
|  | Cirkette™  |
|  | Clear      |
|  | Frosted    |
|  | Grafite™   |
|  | Lake Mist™ |
|  | Oak Park™  |
|  | Starscape™ |

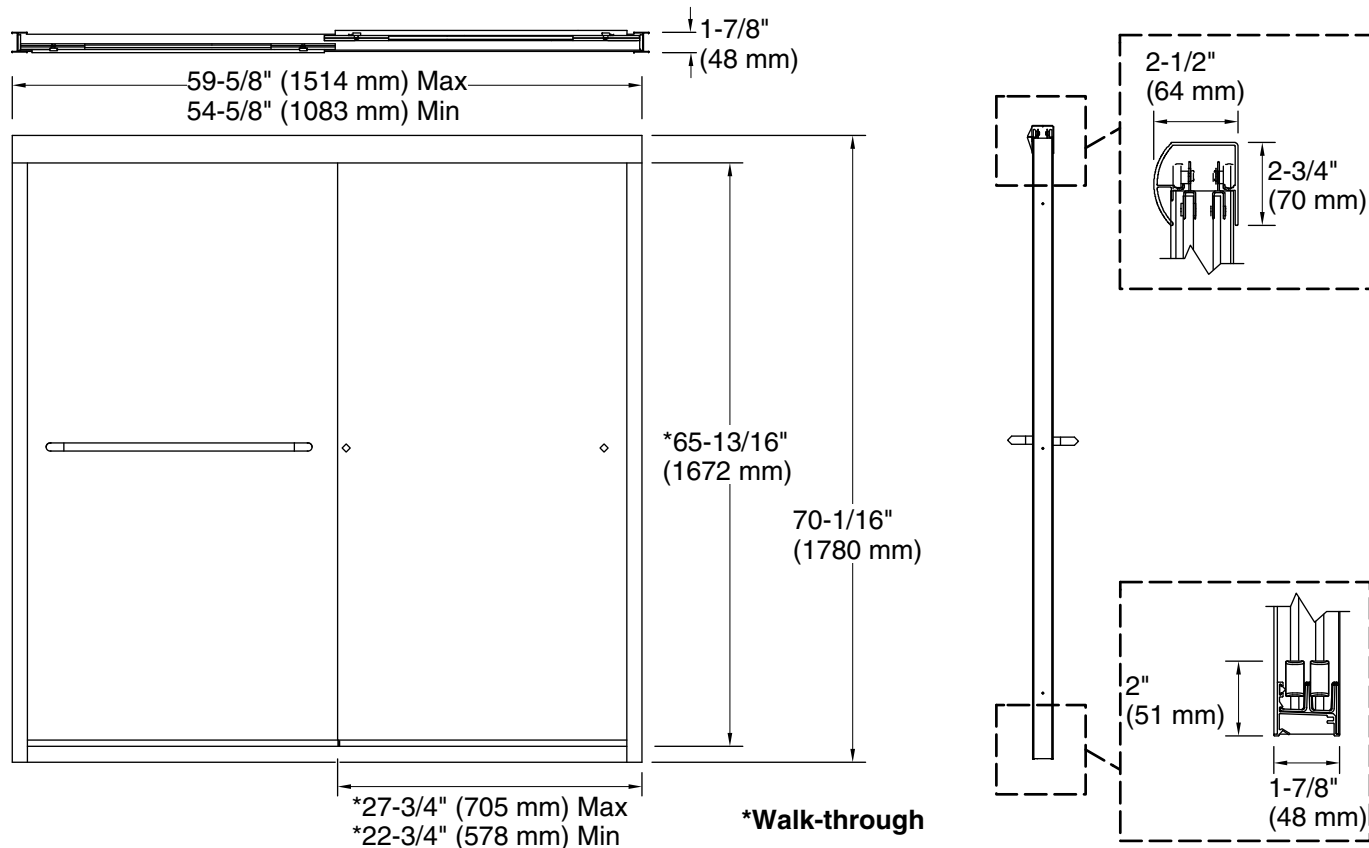

### Technical Information

All product dimensions are nominal.

|                            |                              |
|----------------------------|------------------------------|
| Installation type:         | For shower base installation |
| Opening Width - Min:       | 54-5/8" (1387 mm)            |
| Opening Width - Max:       | 59-5/8" (1514 mm)            |
| Walk-through - Min:        | 22-15/16" (583 mm)           |
| Walk-through - Max:        | 27-15/16" (710 mm)           |
| Base-To-Wall Radius - Max: | 1/2" (13 mm)                 |
| Glass thickness:           | 1/4" (6 mm)                  |
| Glass coating:             | CleanCoat®                   |

### Notes

Install this product according to the installation guide.

The vertical opening should be a minimum of 72-7/16" (1840 mm) to allow for installation clearance.