

The Twinning Kit is designed to allow a single thermostat to control two identical HVAC units. It can also be expanded to control 4 identical HVAC units with one thermostat. The iO-TWIN-TR can be used on common or separate ducted systems with single-stage, multi-stage or heat pump equipment. Uses standard 18-gauge thermostat wire. Thermostats and HVAC units can be located up to 300' from the twinning kit panel. Kit includes control panel and 20VA transformer. The control panel only is available separately (iO-TWIN). Metal Enclosure (iO-PAN-ME) available as an additional option on iO Zone Panels.



## Features and Benefits:

- Easy to install and setup
- Uses standard 18-gauge thermostat wire
- Optional control of up to four units
- Reduces installation time and cost
- Can be used with the Lead/Lag Controller


## Warranty:

- 5 Years

## Specifications:

<b>Mounting</b>	Plastic back plate with mounting holes
<b>Dimensions</b>	8.00" Height x 6.00" Width x 1.50" Depth
<b>Input Voltage</b>	24VAC

# BOARD DIAGRAM

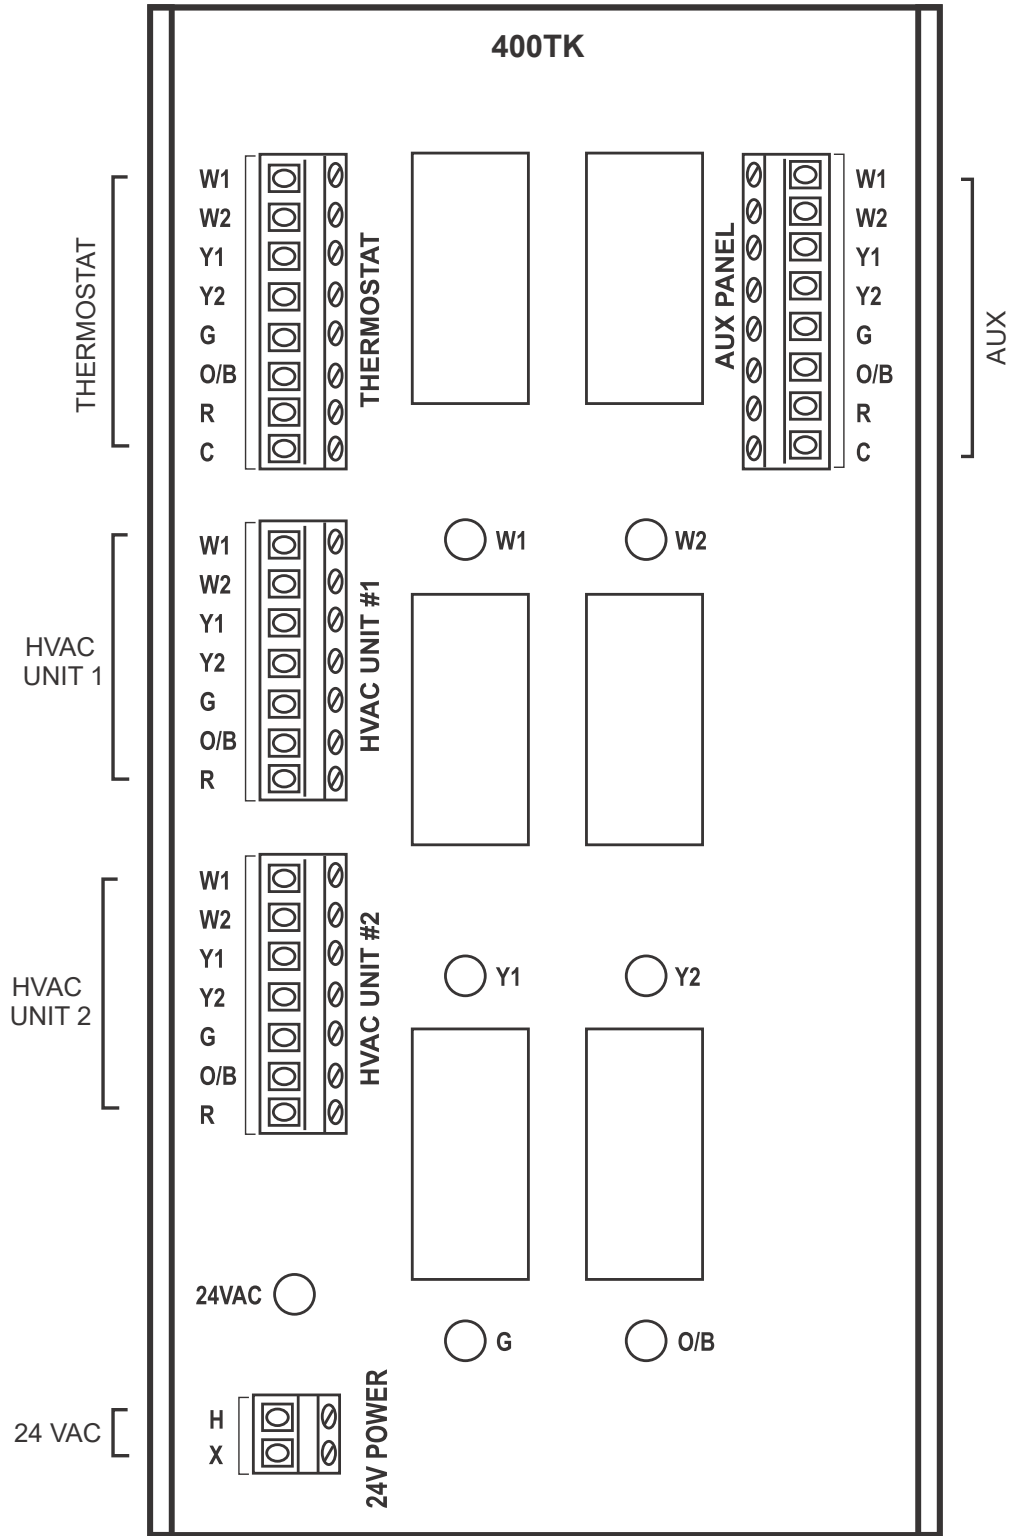

5351 East Thompson Road Suite 142  
 Indianapolis, IN 46237  
 P: 888.359.0362  
 F: 317.489.5204

info@iOhvaccontrols.com  
 www.iOhvaccontrols.com