

710CEP-C SERIES POLY-ALLOY (PPSU) COLD EXPANSION PEX FITTING COUPLING

FEATURES:



- Designed for use in ASTM F1960 Cold Expansion PEX cold and hot water distribution systems
- For use with SDR9 PEX tubing utilizing a PEX expansion ring system
- Larger internal diameter in the fittings providing maximum water flow
- Poly-Alloy material provides resistance to chemicals and in corrosive/aggressive water conditions
- Integral locating tabs to ensure tubing and fitting are installed properly and eliminates faulty connections
- No crimp, expansion connection method provides a positive and leak free connection

SPECIFICATION:

- Max Pressure Rating: 100 PSI
- Max Temperature Rating: 180°F (82°C)
- Solvay Acudel® PPSU Polyphenylsulfone Polymer

CERTIFICATION:

- cUPC Standard ASTM F877 / F1960 & CSA B137.5 Certified
- NSF/ANSI Standard 14 & 372 Certified
- Material complies with NSF/ANSI Standard 61

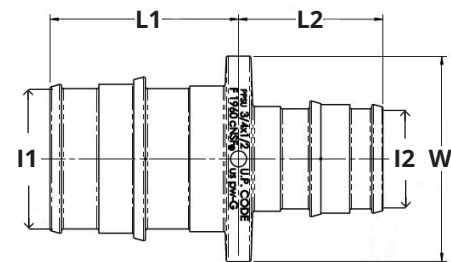

Part No.	Size	DIMENSIONS										Weight
		I1		I2		L1		L2		W		
		inches	mm	inches	mm	inches	mm	inches	mm	inches	mm	
710CEP-C05	1/2"	0.41	10.29	0.41	10.29	0.77	19.63	0.77	19.63	0.84	21.29	4.75
710CEP-C07	3/4"	0.61	15.49	0.61	15.49	1.01	25.63	1.01	25.63	1.09	27.79	9.08
710CEP-C0705	3/4" x 1/2"	0.61	15.49	0.40	10.03	1.01	25.63	0.77	19.63	1.09	27.79	7.66
710CEP-C10	1"	0.81	20.57	0.81	20.57	1.24	31.55	1.24	31.55	1.33	33.78	16.61
710CEP-C1007	1" x 3/4"	0.81	20.57	0.60	15.24	1.24	31.55	1.01	25.63	1.33	33.78	16.25



25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164

boshart.com ♦ blog.boshart.com