


710P-C SERIES POLY-ALLOY (PPSU) CRIMP PEX FITTING - COUPLING

FEATURES:

- Designed for use in ASTM F2159 PEX cold and hot water distribution systems
- For use with SDR9 PEX tubing utilizing a crimp ring system
- Poly-Alloy material provides resistance to chemicals and in corrosive/aggressive water conditions
- Integral locating tabs to ensure tubing and fitting are installed properly and eliminates faulty crimp connections




SPECIFICATION:

- Max Pressure Rating: 100 PSI
- Max Temperature Rating: 180°F (82°C)
- Solvay Acudel® PPSU Polyphenylsulfone Polymer

CERTIFICATION:

- cUPC Standard ASTM F877 / F2159 & CSA B137.5 Certified
- NSF/ANSI Standard 14 & 372 Certified
- Material complies with NSF/ANSI Standard 61

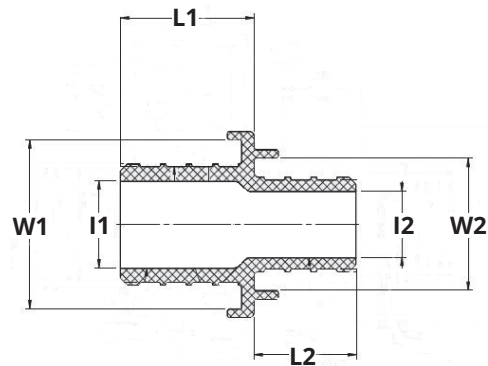

DIMENSIONS														
Part No.	Size	I1		I2		L1		L2		W1		W2		Weight grams
		inches	mm	inches	mm	inches	mm	inches	mm	inches	mm	inches	mm	
710P-C05	1/2"	0.32	8.08	0.32	8.08	0.75	18.92	0.75	18.92	0.68	17.27	0.68	17.27	2.88
710P-C07	3/4"	0.46	11.76	0.46	11.76	0.75	19.05	0.75	19.05	0.93	23.62	0.93	23.62	5.12
710P-C0705	3/4" x 1/2"	0.46	11.76	0.32	8.08	0.70	17.83	0.81	20.57	0.93	23.62	0.68	17.27	4.57
710P-C10	1"	0.61	15.57	0.61	15.57	0.90	22.73	0.90	22.73	1.19	30.23	1.19	30.23	9.45
710P-C1005	1" x 1/2"	0.61	15.57	0.32	8.08	0.94	23.90	0.72	18.31	1.19	30.23	0.68	17.27	6.75
710P-C1007	1" x 3/4"	0.61	15.57	0.46	11.76	0.94	23.90	0.72	18.31	1.19	30.23	0.93	23.62	7.63



25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164

boshart.com ♦ blog.boshart.com