

710P-P SERIES POLY-ALLOY (PPSU) CRIMP PEX FITTING - PLUG

FEATURES:



- Designed for use in ASTM F2159 PEX cold and hot water distribution systems
- For use with SDR9 PEX tubing utilizing a crimp ring system
- Poly-Alloy material provides resistance to chemicals and in corrosive/ aggressive water conditions
- Integral locating tabs to ensure tubing and fitting are installed properly and eliminates faulty crimp connections

SPECIFICATION:

- Max Pressure Rating: 100 PSI
- Max Temperature Rating: 180°F (82°C)
- Solvay Acudel® PPSU Polyphenylsulfone Polymer

CERTIFICATION:

- cUPC Standard ASTM F877 / F2159 & CSA B137.5 Certified
- NSF/ANSI Standard 14 & 372 Certified
- Material complies with NSF/ANSI Standard 61

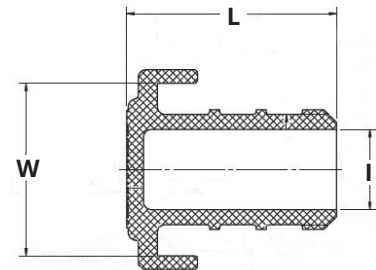

DIMENSIONS								
Part No.	Size	I		L		W		Weight
		inches	mm	inches	mm	inches	mm	
710P-P05	1/2"	0.32	8.08	0.83	21.11	0.68	17.37	1.75
710P-P07	3/4"	0.46	11.76	0.93	23.72	0.83	21.11	3.42
710P-P10	1"	0.61	15.57	1.19	30.33	0.98	24.92	6.16



25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164

boshart.com ♦ blog.boshart.com