


PRODUCT SPECIFICATION:

- Certified to meet CSA B45.5/IAPMO Z124 Standard.
- Product has a Class B fire rating as determined by ASTM E-84 test method.
- Reinforced & slip resistant floor.
- Water migration channel (added in 2019) helps to channel water into the shower pan.
- Integral 1" [25mm] nailing flange.
- All dimensions +/- 1/2" [12.8mm]
- Clarion Bathware reserves the right to change design and/or dimensions.

PLAN
60" [1525mm] x 36" [914mm] Shower Pan
w/ 4" [101mm] Threshold

CENTER DRAIN

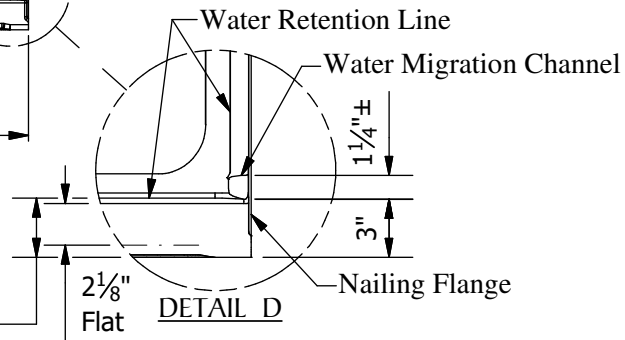

SP6036

60" [1525mm] x 36" [914mm] Shower Pan w/ 4" [101mm] Threshold & Center Drain

Clarion
BATHWARE
44 Amsler Ave.
Shippenville, PA 16254

Phone: (814) 226-5374
Toll Free: (800) 576-9228
Fax: (814) 226-0730
www.clarionbathware.com

Mold Fabrication will not begin until approved drawing is received.
Standard mold production is (_____ weeks) unless quoted otherwise.

Signatures For Approval: _____ Date: _____
Customer: _____
Clarion Engineer: _____
Clarion SVP of Sales: _____

DWG. #
New SP6036 -CUT

By: NMH
Date: 10/4/2021