

COMMERCIAL

Sink Faucet Wallmount

8" (203 mm) Wallmount Less Integral Check Stops
- CER-TECK®

Model No: 28C4925-R7**COMPLIES WITH:**

- Complies to ASME A112.18.1/CSA B125.1
- For commercial use only
- Verified compliant with 0.25% weighted average Pb content regulations
- ICC/ANSI A117.1



(Contact Delta Representative for State and/or Local Approvals)

SPECIFICATION:


- 8" (203 mm) centers cast brass wallmount sink faucet
- Centers adjustable from 7.75" to 8.25" (197 to 210 mm) unless AC option selected
- Two handle
- Less integral check stops
- Polished chrome plated finish
- CER-TECK® 1/4 turn ceramic disk cartridge
- Spout#: R7 - Gooseneck spout - 9.0" (229 mm) spout reach - 12.7" (323 mm) height (unmounted) - Standard rigid/swivel field installation unless LS Limited swing option is selected - Vandal resistant .090" (2 mm) wall thickness (R7)
- Outlet#: 2 - Vandal Res.1.5 GPM (5.7 L/Min) Laminar w/Agion® Antimicrobial
- Handle #5 - 6" (152 mm) Wrist Handles - ADA Compliant - Sanitary Hoods - Colour Indexed - Vandal resistant screws

OPERATION:

- Not Available


(Dimensional drawing on following page)

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. Measurement may vary plus or minus 0.25" (6mm). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced November 06, 2023.

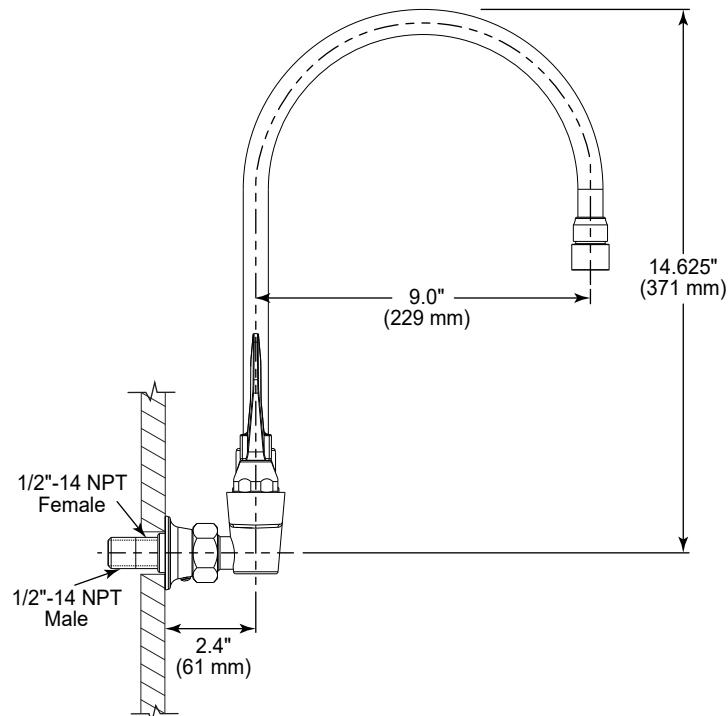

Inlets: 1/2"-14 NPT (female)

1/2"-14 NPT (male) - with supplied nipple

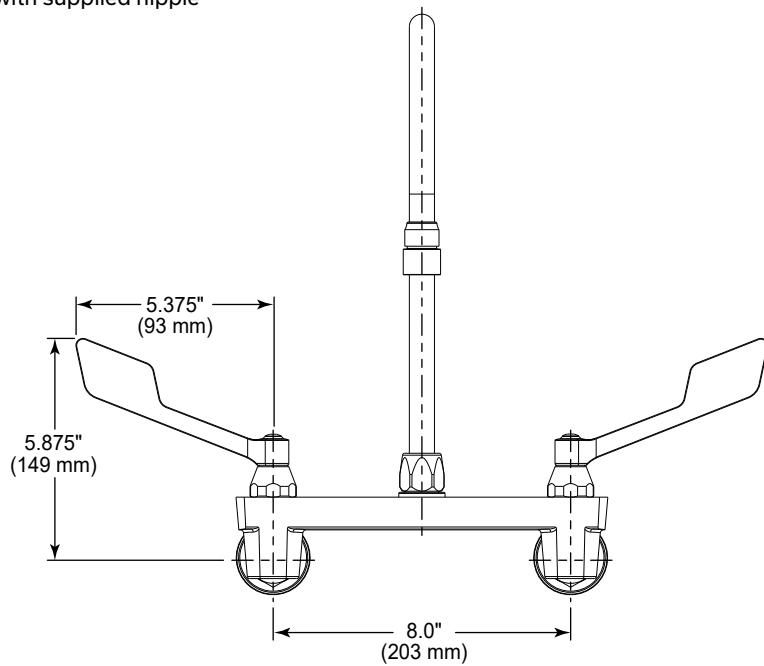

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. Measurement may vary plus or minus 0.25" (6mm). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced November 06, 2023.