



Job Name:	Location:
Purchaser:	
Engineer:	
Submitted To:	For: <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Submitted By:	Date:
Unit Designation: Schedule #:	Model No.:

For use with the following Daikin RA & RA-Multi Indoor Models: FDXS Slim Duct & CTXS / FTXS Wall Mount
 For use with the following Daikin RA & RA-Multi Outdoor Models: RX Std. Efficiency, RXS High Efficiency, 2MXS & 4MXS

FEATURES / BENEFITS
<ul style="list-style-type: none"> Includes 8m (26ft) of cable Built in one time or daily timer functionality with up to 2 timer actions per day LCD lets you display set point temperature in either °F or °C units in 1 degree increments Monitors room temperature and preset temperature by microcomputer and can select cool or heat operation modes automatically based on the set-point requirement Selectable auto / cool / heat / dry operation modes with adjustable temperature and airflow rates Approximately two hour battery backup Required remote control adapter PCB included Controller can be used in conjunction with the factory supplied standard wireless remote controller

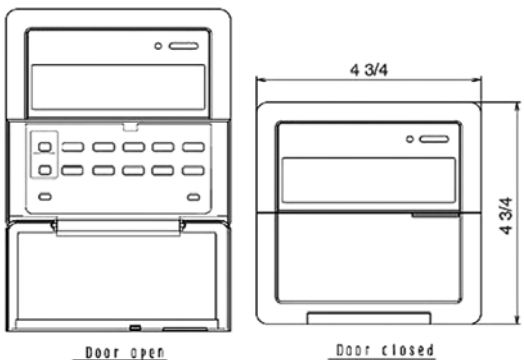

Remote Controller Functions	
OPERATION	Start / Stop
	Operation Mode
	Temperature Setting
	64°F – 90°F Set Point Range
	Fan Speed
MONITORING	Airflow Direction
	Status
	Operation Mode
	Temperature Setting
	Fan Speed
SCHEDULING	One Time Timer
	Daily Timer

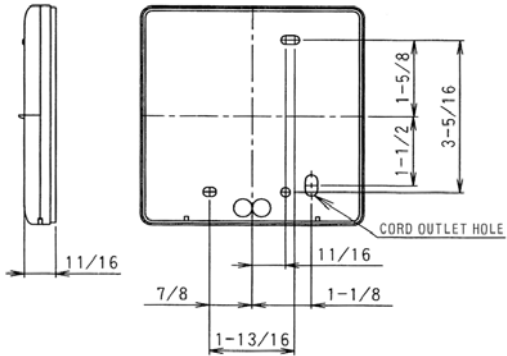

CABLE SPECIFICATIONS	
TYPE	4-wire sheathed vinyl cable
TOTAL LENGTH	BRCW901A08 – Approx. 8m (26ft)