


**Specification: (example)**

**(FOR 1-1/2" TOP INLET CLOSET FIXTURE)  
LESS STOP, WITH MODIFIED TAIL TO FIT SLOAN®/ZURN® STOP**


- Quiet action, TECK® exposed diaphragm flush valve
- Chloramine resistant diaphragm
- Forged brass diaphragm retainer
- Renewable seat
- Polished chrome plated body
- **External water conserving flush volume adjustment,** (except -48 and -6 models) factory set to 6 litre (1.6 gal.)
- Vandal resistant cover screw
- Metal "non hold open" handle
- Adjustable 114mm (4.5") to 131mm (5.18") inlet/valve outlet centers
- Vacuum breaker
- Spud flange and concealed spud nut
- **Recommended water supply:**  
Minimum flowing pressure – 25 psi (172 kPa)  
Minimum flow rate – 25 gpm (95 L/min)

**WITH 292mm (11-1/2") LENGTH:**

- 81T201-30**  
As above
- 81T201-30-6**  
Same as 81T201-30,  
but **Not Field Adjustable**
- 81T201-30-48**  
Same as 81T201-30, but factory set to 4.8 litre (1.27 gal.),  
**Not Field Adjustable**

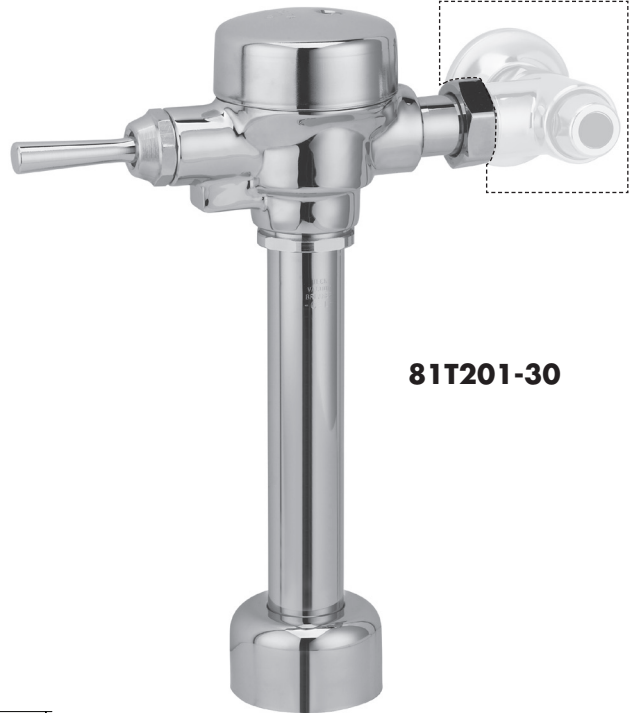

**81T201-30**

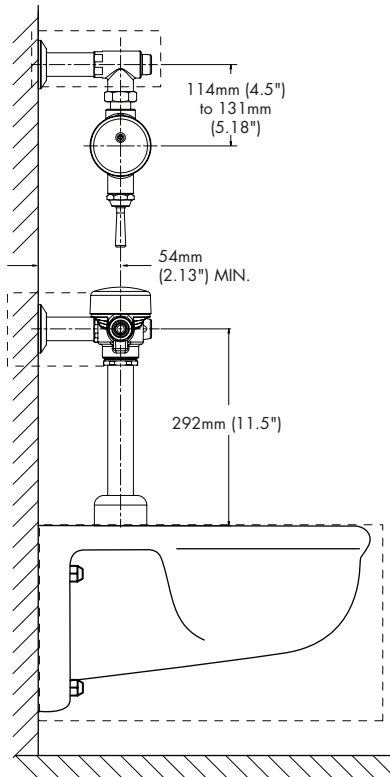

**Items shown outlined  
by dotted lines supplied  
by others.**



**Approvals:**

- IAPMO listed to ASSE 1037/  
ASME A112.1037/CSA B125.37
- Indicates compliance to  
ICC/ANSI A117.1

(Contact Delta Representative for State and/or  
Local Approvals.)

**Engineer/Architect Approval**

Model Specified:

Approval:

Date:

Note: Measurements may vary ± 6mm (0.25")

Note: For high and low pressure applications, please see page  
FEA-81T High Water Pressure note for more details.  
Verify flow requirements with bowl manufacturer.