

March 2013


Product

Clear Vinyl Tubing

Advantages

Applications include: air conditioning and refrigeration condensate drains, condensate pump discharge lines and humidifier overflows.

- Several sizes from 1/4" to 1" diameter
- Non-toxic clear vinyl chloride
- Extra rigid design resists crimping and kinking due to durometer value of 80 (Shore A) and thicker wall
- Maximum service temperature 140° F (60° C)
- Better performance in cold weather climates

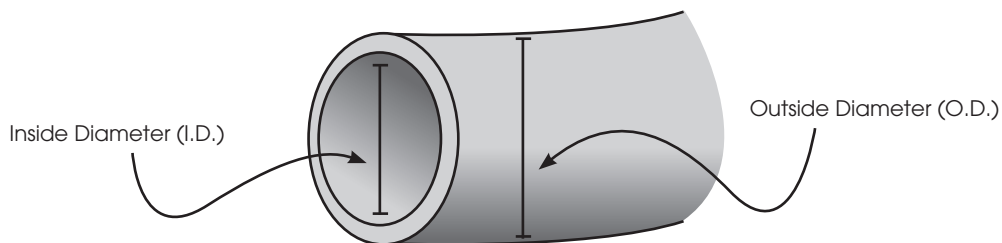

| CATALOG NUMBER | DESCRIPTION | ORDER MULTIPLE |
|----------------|--|----------------|
| 7-14 | 1/4", .250" I.D., .360" O.D., .055 wall thickness | 100ft./box |
| 7-38 | 3/8", .375" I.D., .495" O.D., .060 wall thickness | 100ft./box |
| 7-12 | 1/2", .500" I.D., .631" O.D., .066 wall thickness | 100ft./box |
| 7-58 | 5/8", .625" I.D., .771" O.D., .073 wall thickness | 100ft./box |
| 7-34 | 3/4", .750" I.D., .913" O.D., .082 wall thickness | 100ft./box |
| 7-78 | 7/8", .875" I.D., 1.050" O.D., .088 wall thickness | 50ft./box |
| 7-10 | 1", 1.000" I.D., 1.215" O.D., .108 wall thickness | 50ft./box |