


Twist-Tite Mechanical Plugs

The Twist Mechanical Test Plug is designed for use in standard sized DWV piping for the purpose of blocking or testing of the system. An over-sized wing nut with a wrench pad makes installation easy. Manufactured of high impact ABS, with a steel plated screw, and a zinc nut, this product is rust and corrosion resistant. The sealing gasket is neoprene.

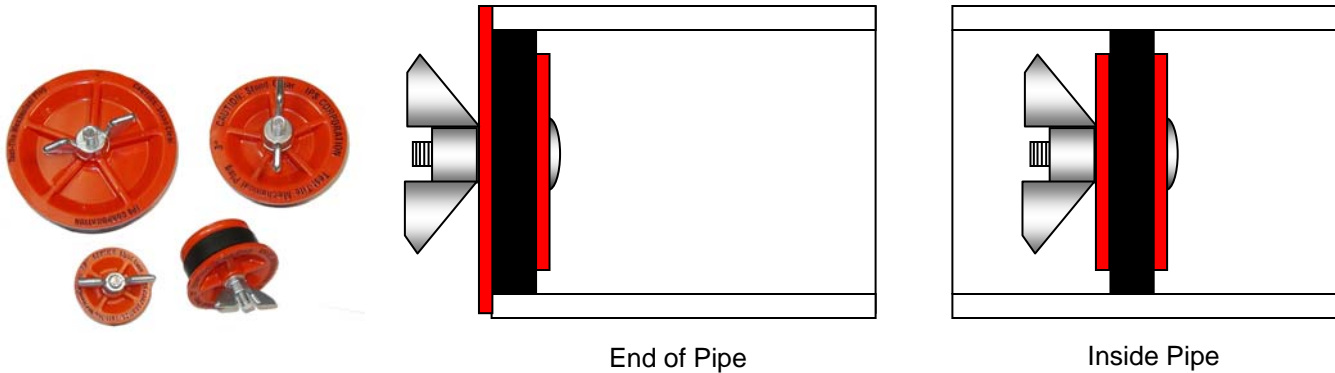

End of Pipe		Pipe Use Range		Maximum Back Pressure			Model #	Units/Case	Shipping Weight (pounds)
Nominal Size (inches)	Product Code	Minimum Pipe Diameter (inches)	Maximum Pipe Diameter (inches)	Bypass Size (inches)	Water Head (feet)	Air (psig)			
1 1/2	83591	1.48	1.65	None	40	5	MWN 1	10	2
2	83592	1.90	2.17	None	40	5	MWN 2	10	2
3	83593	2.80	3.10	None	40	5	MWN 3	10	4
4	83594	3.78	4.06	None	40	5	MWN 4	10	6
6	83596	5.77	6.08	None	30	5	MWN 6	5	8
8	83598	7.76	8.03	None	30	5	MWN 8	5	12

Inside Pipe									
Nominal Size (inches)	Product Code	Minimum Pipe Diameter (inches)	Maximum Pipe Diameter (inches)	Bypass Size (inches)	Water Head (feet)	Air (psig)	Model #	Units/Case	Shipping Weight (pounds)
4	83595	3.78	4.06	None	40	5	MWN 9	10	6
6	83597	5.77	6.08	None	30	5	MWN 10	5	8
8	83599	7.76	8.03	None	30	5	MWN 11	5	12