




ADJUSTABLE STYLE BRASS P-TRAP WITH CLEANOUT PLUG

PLUMBING PRODUCT SPECIFICATION

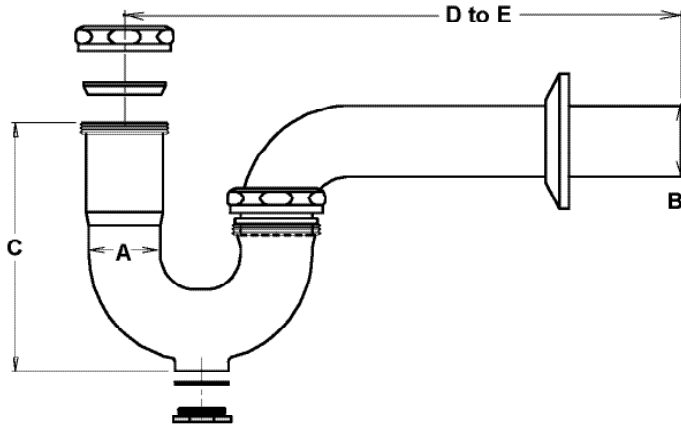

INSTALLATION MEASUREMENTS

PART NO.	INLET OD	OUTLET OD	HEIGHT	LENGTH	Tube
	(A)	(B)	(C)	(D TO E)	GA
306CP*	1 1/2	1 1/2	5	10 1/2	20
306CPDF*	1 1/2	1 1/2	5	10 1/2	20
306PC*	1 1/2	1 1/2	5	10 1/2	20
306PCBN*	1 1/2	1 1/2	5	10 1/2	20
306PCDFBN*	1 1/2	1 1/2	5	10 1/2	17
307CP*	1 1/2	1 1/2	5	10 1/2	17
307CP867*	1 1/2	1 1/2	5	10 1/2	17
307CPBN*	1 1/2	1 1/2	5	10 1/2	17
307CPBN1804*	1 1/2	1 1/2	5	10 1/2	17
307CPBN867*	1 1/2	1 1/2	5	10 1/2	17
307CPBNDF*	1 1/2	1 1/2	5	10 1/2	17
307CPDF*	1 1/2	1 1/2	5	10 1/2	17
307LCPDF*	1 1/2	1 1/2	5	10 1/2	17
307LPC*	1 1/2	1 1/2	5	15 1/2	17
307PC*	1 1/2	1 1/2	5	10 1/2	17
307PCBN*	1 1/2	1 1/2	5	10 1/2	17
307PCDF*	1 1/2	1 1/2	5	10 1/2	17
307PCDFBN*	1 1/2	1 1/2	5	10 1/2	17
307XCPBN*	1 1/2	1 1/2	5	10 1/2	17
307XPCBN*	1 1/2	1 1/2	5	10 1/2	17
307XPCBNDF*	1 1/2	1 1/2	5	10 1/2	17

DESCRIPTION

Brass adjustable style p-trap for plumbing fixture.

Constructed of 17 or 20 gauge seamless brass.

INCLUDES:

- J-bend, wall bend, slip nuts, slip washers and wall flange
- Seamless brass tube only
- Heavy duty chromium finish
- Factory testing to ensure leak free performance

INDUSTRY APPROVALS

- UPC/IAPMO
- CSA
- Mass Code

Listing of parts approved for specific codes available. See Keeney contact information below.

SPECIFIER APPROVAL

Job Name	Date
Model	Qty
Wholesaler	
Contractor	
Architect	

**FOR MORE INFORMATION CALL 1-800-243-0526
OR E-MAIL NCS@UPT.COM**

THE KEENEY MANUFACTURING COMPANY

www.keeneymfg.com

PART # SUFFIX DESIGNATIONS

- | | |
|----------------------|--------------------------------|
| BN - Brass nuts | PC - Polished finish |
| CP - Chromium plated | RB - Rough brass finish |
| DF - Deep flange | X - Ground joint connection |
| L - 12" Wall bend | 867 - Box flange 1.5" |
| LL - 15" Wall bend | 1804 - set screw flange 1 1/2" |

* Part #'s provided standard with Keeney's unique Red TPE "leak free technology" washers

*Keeney Representative
Stamp or Label Here*