




ADJUSTABLE STYLE BRASS S-TRAP WITHOUT CLEANOUT PLUG

PLUMBING PRODUCT SPECIFICATION

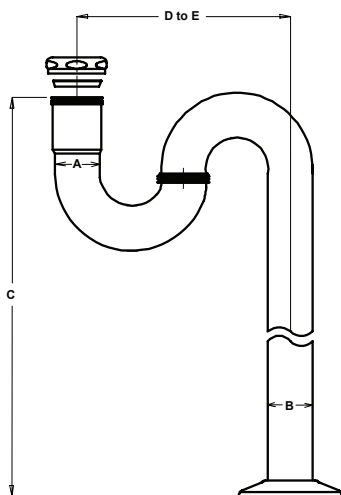

DESCRIPTION

Brass S-trap, adjustable style without cleanout.

Constructed of 17, 20, or 22 gauge seamless brass.

INCLUDES:

- J-bend, floor tube, slip nuts, slip washers and wall flange
- Seamless brass tube only
- Heavy duty chromium finish
- Factory testing to ensure leak free performance

INDUSTRY APPROVALS

- UPC/IAPMO
- Mass Code
- LA Code

Listing of parts approved for specific codes available. See Keeney contact information below.

SPECIFIER APPROVAL

Job Name	Date
Model	Qty
Wholesaler	
Contractor	
Architect	

**FOR MORE INFORMATION CALL 1-800-243-0526
OR E-MAIL NCS@UPT.COM**

THE KEENEY MANUFACTURING COMPANY

www.keeneymfg.com

INSTALLATION MEASUREMENTS

PART NO.	INLET OD	OUTLET OD	HEIGHT	LENGTH	Tube
	(A)	(B)	(C)	(D TO E)	GA
324CCP	1 1/4	1 1/4	20	6	22
324CP*	1 1/4	1 1/4	20	6	20
324CPBN*	1 1/4	1 1/4	20	6	20
324CPBN866*	1 1/4	1 1/4	20	6	20
324CPBNDF	1 1/4	1 1/4	20	6	20
324CPDF	1 1/4	1 1/4	20	6	20
325CP*	1 1/4	1 1/4	20	6	17
325CPBN*	1 1/4	1 1/4	20	6	17
325CPBN866*	1 1/4	1 1/4	20	6	17
325CPBNDF*	1 1/4	1 1/4	20	6	17
325CPDF*	1 1/4	1 1/4	20	6	17
325PC*	1 1/4	1 1/4	20	6	17
325PCBN*	1 1/4	1 1/4	20	6	17
325PXCPCBNDF*	1 1/4	1 1/4	20	6	17
332CCP*	1 1/2	1 1/2	20	6	22
332CP*	1 1/2	1 1/2	20	6	20
332CPBN*	1 1/2	1 1/2	20	6	20
332CPBNDF*	1 1/2	1 1/2	20	6	20
332CPDF*	1 1/2	1 1/2	20	6	20
333CP*	1 1/2	1 1/2	20	6	17
333CPBN*	1 1/2	1 1/2	20	6	17
333CPBN867*	1 1/2	1 1/2	20	6	17
333CPBNDF*	1 1/2	1 1/2	20	6	17
333CPDF*	1 1/2	1 1/2	20	6	17

PART # SUFFIX DESIGNATIONS

BN - Brass nuts	X - Ground joint connection
CP - Chromium plated	PX- Durabond grout joint
DF - Deep flange	866 - Box Flange 1 1/4"
PC - Polished finish	867 - Box Flange 1 1/2"
RB - Rough brass finish	

* Part #'s provided standard with Keeney's unique Red TPE "leak free technology" washers

*Keeney Representative
Stamp or Label Here*