Accliv™

KOHLER, FAUCETS Touchless single-hole lavatory faucet, less drain, 0.35

gpm K-103A36-SBTA

Features

- Operates via battery, plug-in AC power, or Hybrid Energy System (each sold separately)
- Design-forward aesthetic for commercial bathroom spaces
- Below-counter valving reduces the faucet footprint and provides easier service
- 0.35 gpm (1.3 lpm) maximum flow rate with vandal-resistant aerator
- On-demand usage with 30-second max. continual run cycle to prevent vandalism and save water
- 4" (102 mm) spout reach
- Pair with select KOHLER[®] soap dispensers and single or two-hole escutcheons for an easy retrofit
- Includes spout and control box assemblies, and standard mounting hardware
- Less drain
- Concealed mechanical mixer sold separately
- Complies with the Safe Drinking Water Act (SDWA)

Material

Premium material construction for durability and reliability

Installation

Single-hole mounting

Required Products/Accessories

K-13480-A AC Single Supply

or

K-13481-A Multi-Outlet Power Supply

or

K-36264 DC-powered battery pack for commercial touchless faucets

or

K-28520 High-efficiency battery pack for commercial touchless sensor faucets

Recommended Products/Accessories

- K-13481 Multi-Outlet Power Supply K-13480 AC Single Supply
- K-24154 Mechanical mixing valve

Optional Products/Accessories

K-38166 8" two-hole escutcheon plate for Insight[™] and Kinesis® lavatory faucets and soap dispensers K-38167 4" two-hole escutcheon plate for Insight[™] and Kinesis® lavatory faucets and soap dispensers K-38168 8" two-hole escutcheon plate for Insight™ and Kinesis® lavatory faucets and soap dispensers K-38169 4" two-hole escutcheon plate for Insight[™] and Kinesis® lavatory faucets and soap dispensers

1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications. For the most current Specification Sheet, go to www.kohler.com USA or www.kohler.ca Canada 6-15-2024 00:39 - US





Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 61 NSF/ANSI/CAN 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color Code Description

CP **Polished Chrome**



Accliv™

KOHLER, Faucets Touchless single-hole lavatory faucet, less drain, 0.35 gpm K-103A36-SBTA

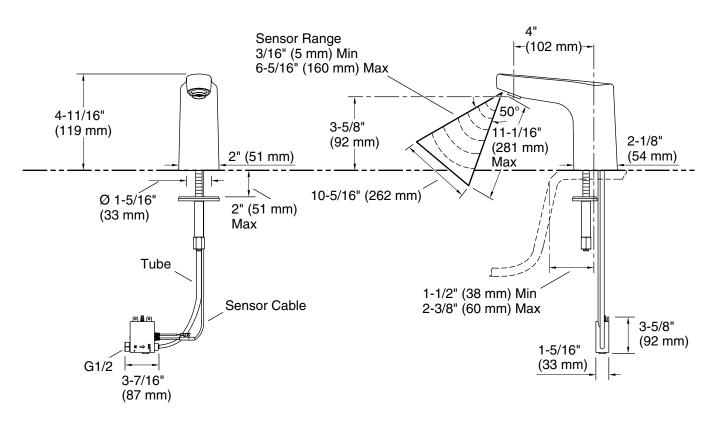

Required Electrical Service

One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

110/220 V

Technical Information

All product dimensions are nominal.

Power source:	Hardwire - AC and Plug - AC, not included
Faucet:	
Flow rate:	0.35 gal/min (1.3 l/min)
Pressure:	60 psi (4.1 bar)
Drain included:	No
Drain with overflow:	Yes
Spout:	

4" (102 mm)

Spout reach:

Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

