

Loure® Touchless faucet w/Kinesis® sensor, AC-powered K-123L36-SANL

## Features

- Kinesis<sup>®</sup> technology with concealed sensor allows for a clean aesthetic and provides extraordinarily accurate and reliable actuation in varying installation environments
- Below-counter valving reduces the faucet footprint and provides easier service
- Design-forward aesthetic for commercial bathroom spaces
- 0.5 gpm (1.9 lpm) maximum flow rate
- Requires K-13480 single or K-13481 multiple AC adapter unit
- On-demand usage with 30-second max. continual run cycle to prevent vandalism and save water
- Vandal-resistant laminar outlet
- 18" (457 mm) stainless steel braided flexible supply hose for easy installation
- 8-1/8" (206 mm) spout reach
- Grid drain
- Concealed mechanical mixer sold separately
- Complies with the Safe Drinking Water Act (SDWA)
- Includes spout assembly, grid drain, control box assembly, supply hose, and standard mounting hardware

### Material

- Brass spout
- Cast brass valve

# Technology

 Kinesis® sensor technology offers on-demand detection for maximum water savings

# Installation

Wall-mount

# **Required Products/Accessories**

K-13480-A AC Single Supply

or

K-13481-A Multi-Outlet Power Supply

# **Recommended Products/Accessories**

K-23726 Drain treatment K-23723 Faucet cleaner

### **Included Components**

K-7129-A Drain





## Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 61 NSF/ANSI/CAN 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC IAPMO Certification

# KOHLER<sup>®</sup> One-Year Limited

#### Warranty

See website for detailed warranty information.

# **Available Colors/Finishes**

Color tiles intended for reference only.


Color Code Description

СР	Polished Chrome
BN	Vibrant® Brushed Nickel
BL 2MB	Matte Black Vibrant® Brushed Moderne Brass



# KOHLER. Faucets

# Loure® Touchless faucet w/Kinesis® sensor, AC-powered K-123L36-SANL

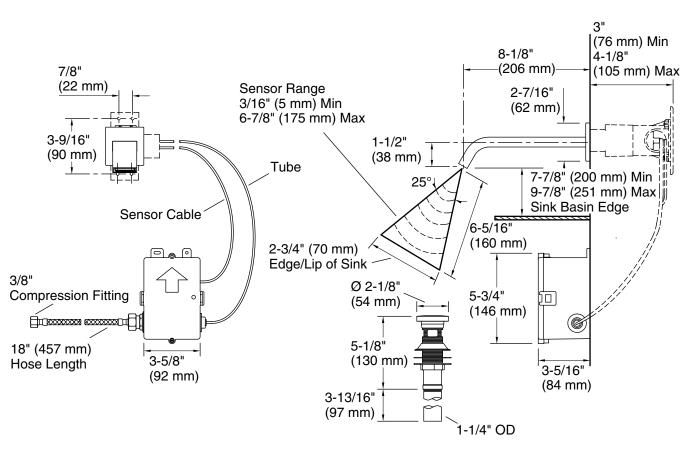

# **Required Electrical Service**

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD). 120/240 V, 50/60 Hz

# **Technical Information**

All product dimensions are nominal.

Power source:	Hardwire - AC and Plug - AC, not included
Faucet:	
Flow rate:	0.5 gal/min (1.9 l/min)
Pressure:	60 psi (4.1 bar)
Drain included:	Yes
Spout:	
Spout reach:	1-1/2" (38 mm)

# Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

