



66" x 33" freestanding bath with Biscuit exterior **K-21000-B** 

### **Features**

- Freestanding bath is a focal point and adds character to your bathing space.
- Integral lumbar support on both ends.
- Safeguard® slip-resistant surface on bath floor.
- Coordinates with Artifacts® faucets.

#### Material

- KOHLER® enameled cast iron.
- Painted exterior in Biscuit.

### Installation

Freestanding.

## **Required Products/Accessories**

K-204 ball-and-claw feet
K-7159 1-1/2" pop-up bath drain for freestanding baths
or

K-20027 bath base for freestanding bath K-7159 1-1/2" pop-up bath drain for freestanding baths

## **Recommended Products/Accessories**

K-23726 Drain treatment K-23725 Cast iron cleaner



## Codes/Standards

ASME A112.19.1/CSA B45.2

# KOHLER® Enameled Cast Iron Bath and Shower Base Lifetime Limited Warranty

See website for detailed warranty information.

### **Available Colors/Finishes**

Color tiles intended for reference only.

**Color Code Description** 


96 Biscuit





# Artifacts™




## 66" x 33" freestanding bath with Biscuit exterior K-21000-B

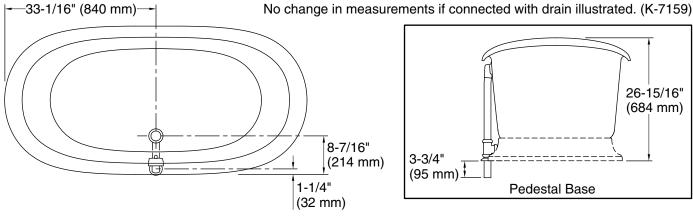



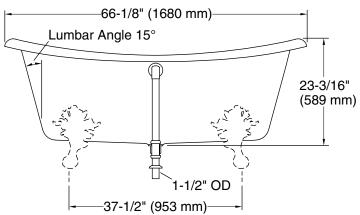



## **Technical Information**

All product dimensions are nominal. Installation: Freestanding Drain location: Center rear

48-15/16" x 24-3/4" (1243 mm x 629 mm) Basin area, bottom:

58-11/16" x 27-13/16" (1491 mm x Basin area, top:

706 mm)

Weight: 389.5 lbs (176.7 kg) Minimum floor load: 90 lbs/ft<sup>2</sup> (439.4 kg/m<sup>2</sup>) Water depth: 14-3/8" (366 mm) Water capacity: 90 gal (340.7 L)

Footprint, 1344921-7, required, not Template:

included

### **Notes**

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

