

Features

- Two-function pull-out sprayhead with touch-control allows you to switch from aerated stream to spray.
- ProMotion® technology's light, quiet braided hose and ball-joint swivel make the pull-out sprayhead easier and more comfortable to use.
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup.
- 7-1/2" (191 mm) rotating spout.
- Single lever handle makes adjusting water temperature easy.
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage.
- 1.5 gpm (5.7 lpm) maximum flow rate at 60 psi (4.14 bar).
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance.

**ADA** **CSA B651****Codes/Standards**

ASME A112.18.1/CSA B125.1

NSF/ANSI 61

NSF/ANSI 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

CSA B651

Material

- Premium metal construction for durability and reliability.
- KOHLER finishes resist corrosion and tarnishing.

Installation

- Single- or three-hole installation (escutcheon included).
- Flexible supply lines simplify installation.

Adapters, Rough-in and Extension Kits1327990 Range: 2-1/2" (64 mm) -
4-5/8" (117 mm)**Recommended Products/Accessories**

K-23723 Faucet cleaner

Optional Products/Accessories

1012715


KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

KOHLER® Faucets

Jolt™

Pull-out single-handle kitchen sink faucet
K-30612

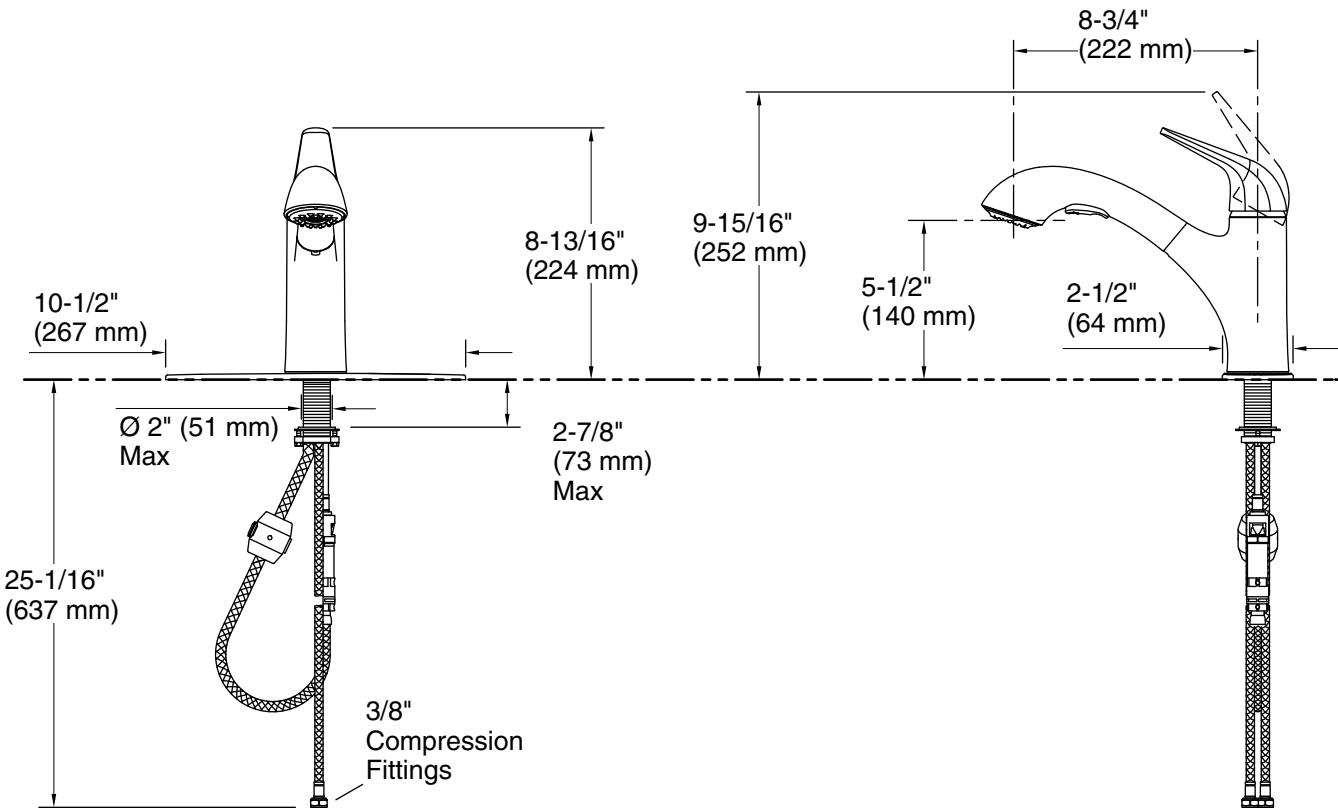

Technical Information

All product dimensions are nominal.

Drain included: No

Notes

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.