



Iron Works® Historic™

5.5' freestanding oval bath
K-710-P5

Features

- Traditional design brings classic, eye-catching style to the bathroom.
- Oval shape creates a graceful and spacious bathing experience.
- Integral lumbar support.
- Safeguard® slip-resistant surface on bath floor.
- Integral lumbar support.

Material

- KOHLER® enameled cast iron.
- Cast iron with Safeguard® finish.
- Painted exterior surface smoothness can vary from product to product.

Installation

- Reversible drain.
- Freestanding.

Required Products/Accessories

K-1103 ball-and-claw feet

Recommended Products/Accessories

K-1491 Bath/Whirlpool Pillow
K-1601 Bath/whirlpool footstop, removable
K-7104 1-1/2" Exposed Bath Drain
K-7178 Decorative Bath Drain
K-16210-4A bath faucet with spout, handles, and handshower
K-331-4M bath faucet with handshower
K-6905-4 Bath Faucet
K-23726 Drain treatment
K-23725 Cast iron cleaner



Codes/Standards





ASME A112.19.1/CSA B45.2
ASTM F462

KOHLER® Enameled Cast Iron Bath and Shower Base Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|---|------|-------------|
|  | 0 | White |
|  | 96 | Biscuit |
|  | NY | Dune |
|  | G9 | Sandbar |






Iron Works® Historic™

5.5' freestanding oval bath

K-710-P5

No change in measurements if connected with drain illustrated. (K-7178)

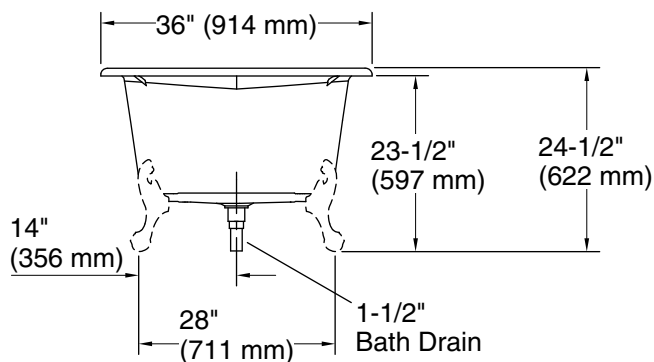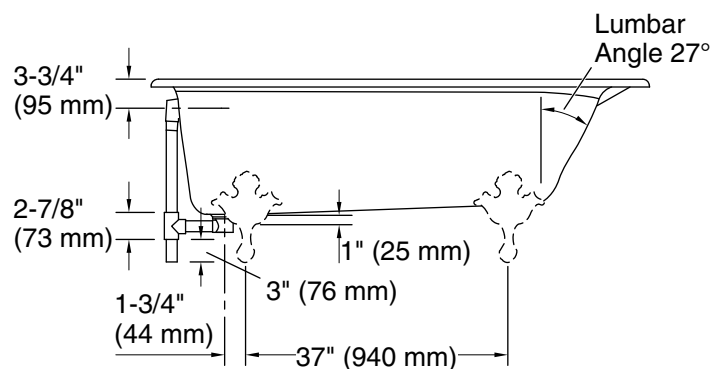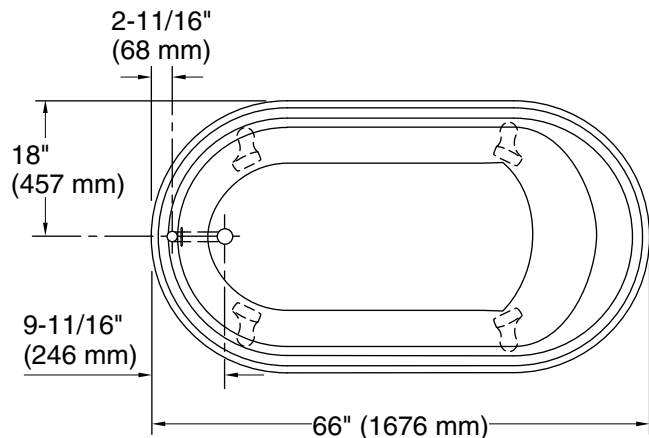

Technical Information

All product dimensions are nominal.

| | |
|---------------------|---|
| Installation: | Freestanding |
| Drain location: | End |
| Basin area, bottom: | 47-1/2" x 25" (1207 mm x 635 mm) |
| Basin area, top: | 55" x 29" (1397 mm x 737 mm) |
| Weight: | 350 lbs (158.8 kg) |
| Minimum floor load: | 57 lbs/ft ² (278.3 kg/m ²) |
| Water depth: | 12-5/8" (321 mm) |
| Water capacity: | 64 gal (242.3 L) |

Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.