

Purist®

Two-hole bridge kitchen sink faucet K-7547-4

Features

- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- Two lever handles offer separate control of hot and cold water
- Coordinates with other products in the Purist collection
- 1.5 gpm (5.7 lpm) maximum flow rate at 60 psi (4.14 bar)

Material

- Premium metal construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

Installation

- Two-hole installation
- Flexible supply lines simplify installation

Recommended Products/Accessories

K-77685 Single-Cartridge Water Filtration System K-77686 Double-Cartridge Water Filtration System K-77687 single replacement filter cartridge K-77688 Replacement Filter Cartridges, Two-Pack K-23723 Faucet cleaner





Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 61 NSF/ANSI/CAN 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651

KOHLER[®] Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color Code Description

CP Polished Chrome SN Vibrant® Polished Nickel VS Vibrant® Stainless BL Matte Black 2MB Vibrant® Brushed Moderne Brass



KOHLER, Faucets

Purist® Two-hole bridge kitchen sink faucet K-7547-4

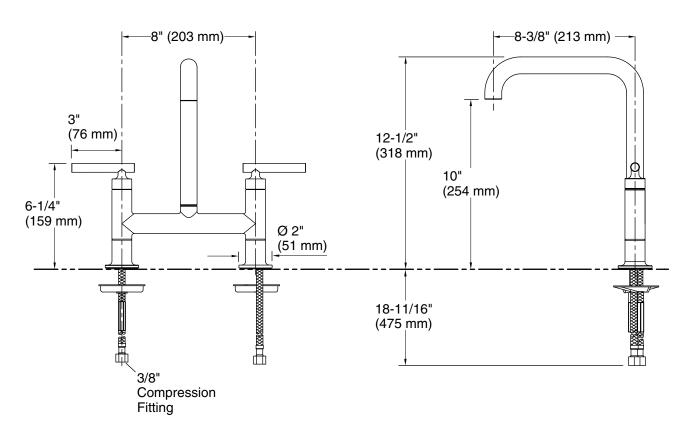

Technical Information

All product dimensions are nominal.

Notes

Install this product according to the installation guide.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

