

### Features

- Fixture-mount design.

### Material

- Durable brass construction.
- Chloramine resistance on all rubber components exposed to waterway.

### Technology

- Non-hold open piston technology for accurate activation.

### Installation

- Intended for urinal installations with 3/4" (19 mm) top spud coupling connection.
- Includes vacuum breaker and control stop.
- Self-cleaning brass piston prevents clogging and reduces maintenance.

### Recommended Products/Accessories

K-23723 Faucet cleaner



ADA CSA B651 OBC

### Codes/Standards

ASSE 1037/ASME A112.1037/CSA B125.37  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC

### KOHLER® One-Year Limited Warranty


See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

| Color   | Code | Description     |
|---|------|-----------------|
|  | CP   | Polished Chrome |

\*10-3/4" (273 mm) minimum with a  
6" (152 mm) critical level above the fixture

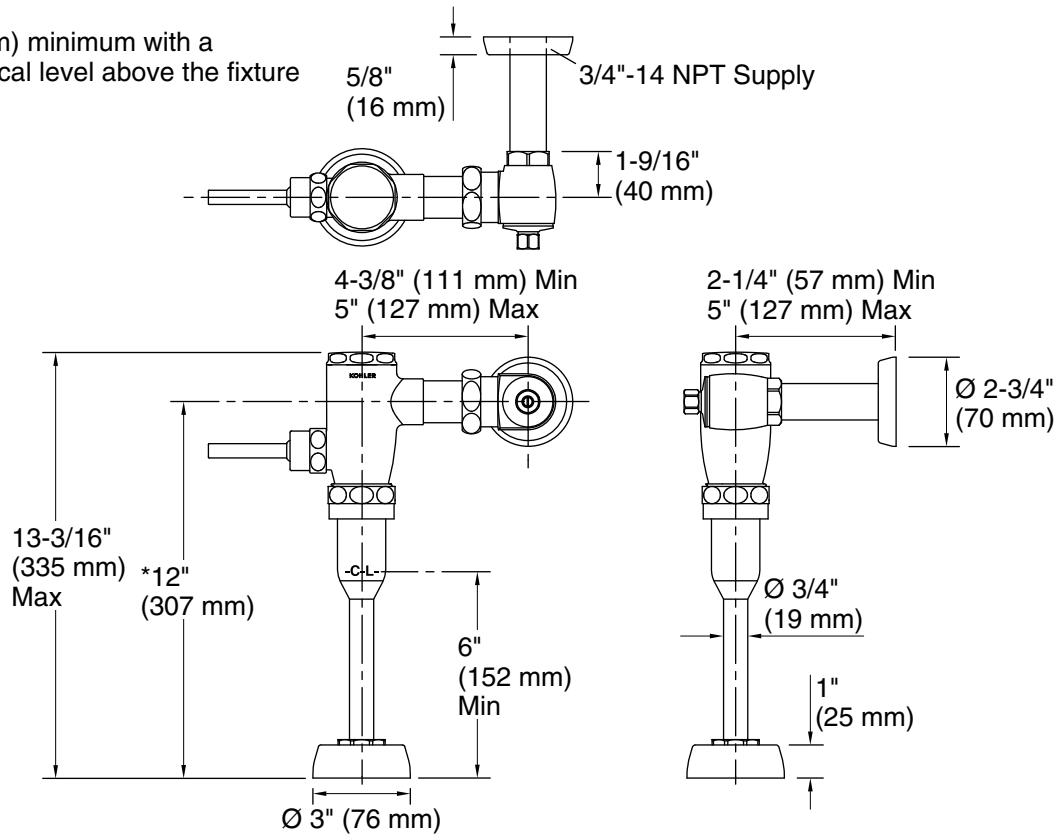

### Technical Information

All product dimensions are nominal.

Fixture pressure 80 psi (551.6 kPa)  
max (static):

### Pressure and Supply Requirements

Fixture pressure min 25 psi (172.4 kPa)  
(static):

### Fixture Supply Requirements

Min static pressure: 25 psi (172.4 kPa)  
Max static pressure: 80 psi (551.6 kPa)  
Min flowing pressure: 25 psi (172.4 kPa)  
Min flow rate: 9 gpm (34.1 lpm)

### Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.