



**Cairn®**  
Under-Mount Bar Sink  
**K-8223**

### Features

- 18-inch minimum base cabinet.
- Single bowl.
- 9-1/2" depth provides generous workspace.
- Includes K-5658 bottom sink rack.
- Includes cutout templates and installation clips.

### Material

- KOHLER Neoroc® composite is durable and built to withstand day-to-day cleaning tasks.
- Matte finish offers rich, dimensional color.
- Solid color throughout the sink.
- Heat resistant up to 750°F.
- Scratch, stain, chip, and thermal-shock resistant.

### Installation

- No faucet holes.
- Undermount.
- Easy to install in a one-person, single-day project.

### Recommended Products/Accessories

K-8801 Sink Strainer  
K-8799 Sink Strainer  
K-23726 Drain treatment  
K-23730 Neoroc® cleaner

### Optional Products/Accessories

K-11352 Disposal Flange with Stopper  
K-9000 P-Trap

### Included Components

Additional Components:  
K-5658



**ADA**

### Codes/Standards









CSA B45.5/IAPMO Z124  
ADA  
ICC/ANSI A117.1



### KOHLER® Neoroc® Sinks Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CM6	Matte White
	CM7	Matte Graphite
	CM5	Matte Beige
	CM8	Matte Black Plum
	CM1	Matte Black
	CM2	Matte Brown
	CM3	Matte Taupe
	CM4	Matte Grey

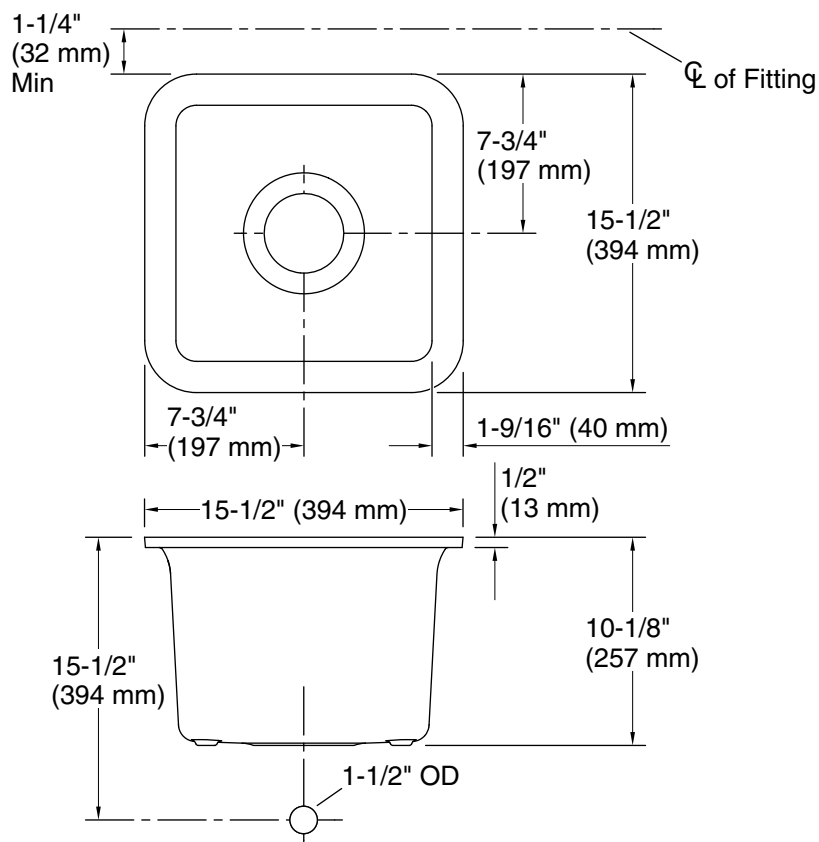

## Technical Information

All product dimensions are nominal.

Installation:	Under-mount
Bowl area:	Length: 13-9/16" (344 mm)
	Width: 13-9/16" (344 mm)
	Bowl depth: 9-1/2" (241 mm)
	Water depth: 9-1/2" (241 mm)
Template:	1257826-7, required, included

## Notes

Install this product according to the installation instructions.

ADA compliant when installed to the specific requirements of these regulations.

ADA permits a parallel approach to wet bars.