

# Tea-for-Two®

60" x 36" drop-in bath **K-850** 

### **Features**

- 60"L x 32"W x 18-1/4"H.
- The only two-person bath that fits into a standard 5' alcove.
- Constructed of KOHLER® Cast Iron.
- Spacious design accommodates up to two bathers.

### Installation

- Drop-in, under-mount, or alcove.
- Requires K-23856 cable pop-up bath drain and K-23857 bath drain trim (sold separately).

## **Required Products/Accessories**

K-23856 1-1/2" cable pop-up bath drain

or

K-23857 Bath drain trim

### **Recommended Products/Accessories**

K-586 Under-Mount Installation Kit

K-1172 Adjustable feet

K-1179 Vinyl Tiling-in Bead

K-1491 Bath/Whirlpool Pillow

K-1601 Bath/whirlpool footstop, removable

K-702200-G73 Frameless Sliding Bath Door

K-702200-L Frameless Sliding Bath Door

K-706000-D3 Frameless Sliding Bath Door

K-706000-L Frameless Sliding Bath Door

K-706003-L Frameless Sliding Bath Door

K-706004-D3 Frameless Sliding Bath Door

K-706004-L Frameless Sliding Bath Door

K-706007-L Frameless Sliding Bath Door

K-23726 Drain treatment

K-23725 Cast iron cleaner



## Codes/Standards

ASME A112.19.1/CSA B45.2 ASTM F462 ADA ICC/ANSI A117.1

## **KOHLER® Enameled Cast Iron Bath** and Shower Base Lifetime Limited Warranty

See website for detailed warranty information.

### **Available Colors/Finishes**

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	33	Mexican Sand™
	K4	Cashmere
	58	Thunder™ Grey
413	7	Black Black™
	GRL	Grey Lavender
11.0	DGB	Indigo Blue
	PLM	Black Plum







# **Tea-for-Two®**


60" x 36" drop-in bath K-850

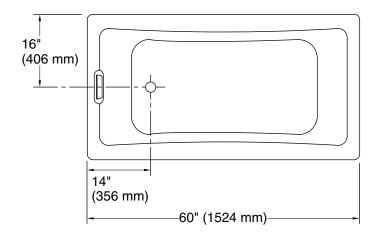

No change in measurements if connected with drain illustrated. (K-23856-NA)



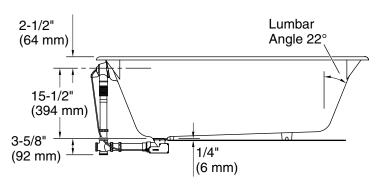



### **Technical Information**

All product dimensions are nominal.

Installation: Drop-in, Under-mount, Three-wall

alcove

Drain location: End

Basin area, bottom: 40-1/2" x 20" (1029 mm x 508 mm) Basin area, top: 52-3/4" x 24" (1340 mm x 610 mm)

Weight: 250 lbs (113.4 kg) Minimum floor load: 58 lbs/ft2 (283.2 kg/m2) Water depth: 13-5/8" (346 mm)

Water capacity: 60 gal (227.1 L)

Cutout: Drop-in, 58-1/2" x 30-1/2" (1486 mm x

For the most current Specification Sheet, go to www.kohler.com.

775 mm)

Template: Under-mount, K-586, required, not

included

Minimum flat for 2-1/4" (57 mm)

door:

#### **Notes**

Measure your actual product for rough-in

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Kit is required for under-mount installations (sold separately).

ADA compliant when installed to the specific requirements of these regulations.

