

SUBMITTAL SHEET

JOB NAME		ITEM TAG	
JOB LOCATION		PART NUMBER	
CONTRACTOR	DATE		
ENGINEER APPROVAL	DATE		

FLARE X FLARE UNION


Model T-4200

Above fittings conform to A.W.W.A.

C-800 underground service line valves and fittings

Working Pressure, Non Shock (PSI)


Cold working pressure (CWP): 100 PSI 3/4" - 1", 80 PSI 1-1/4" - 2"

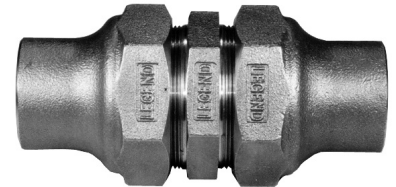

**Pictured
Model T-4200**

DIMENSIONS T-31

Size	A	B	C	D
3/4"	1.73	4.49	1.52	0.88
1"	2.02	5.14	1.83	1.16
1-1/4"	2.33	5.79	2.38	1.40
1-1/2"	2.67	6.43	2.90	1.68
2"	3.45	8.25	3.57	2.18

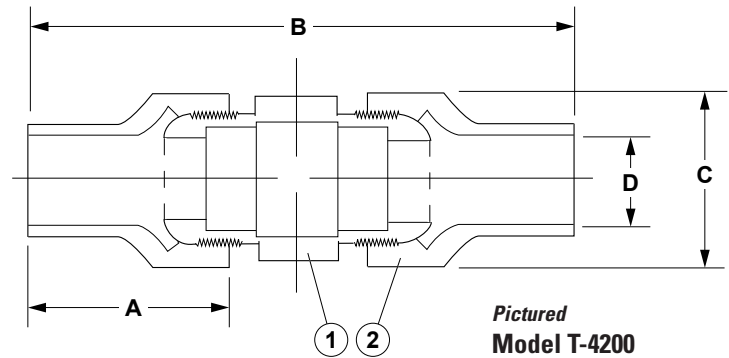

**Pictured
Model T-4200
Cut-away**

MATERIAL SPECIFICATION

PART	MATERIAL	SPECIFICATION
1 Body	Bronze	ASTM B-62) C83600
2 Flare nut	Bronze	ASTM B-62) C83600